

Product data sheet

Hummel connectors


Inserts 4+3+PE 630V



Sockets

7.003.908.102

<https://www.ac-solutions.be/en/product/7003908102>

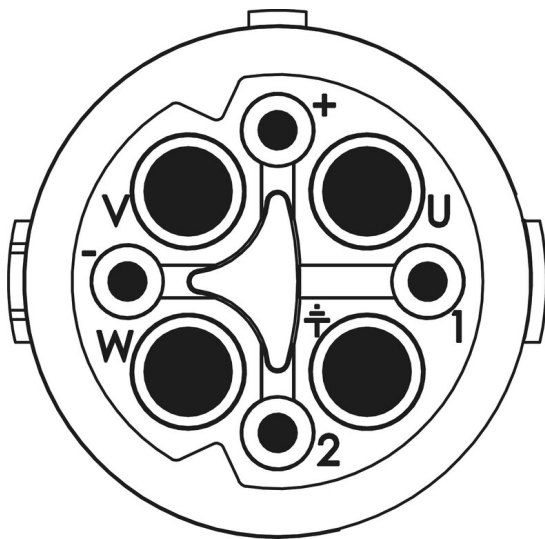

Specifications

General Characteristics

Size	M16
Number of contacts	4+3+PE
Gender	Female
Upper temperature	+125 °C
Lower temperature	-40 °C
Locking	Screw locking Twilock
Protection degree	IP67/IP69K
Wire section (a)	0,08-0,34 mm ²
Wire section (b)	0,34-1,5 mm ²
Terminal type	Crimp
Required crimp contacts	4x0,8mm & 4x1,25mm
Contact diameter (a)	0.8 mm
Contact diameter (b)	1.25

Electrical Parameters

Product data sheet

Hummel connectors

Inserts 4+3+PE 630V



Nominal voltage (degree of pollution 3) (a)	300 V~
Nominal voltage (degree of pollution 3) (b)	630 V~
Test voltage (a)	1500 V~
Test voltage (b)	2500 V~
Nominal current	5 A
Nominal current (b)	16 A
Insulation resistance	> 10 ¹² ?
Max. contact resistance (a)	3 m?
Max. contact resistance (b)	3 m?

Material

Material	Thermoplastic Polyamid PA 6/Fire protection class V-0
----------	---