


Twilock-S, Panel Connector, Male Thread

Front Mounting

7.410.000.00S

<https://www.ac-solutions.be/en/product/741000000s>

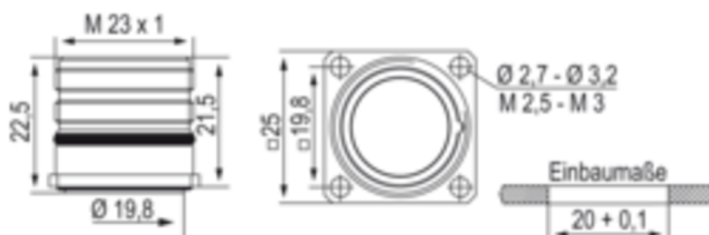

Specifications

General Characteristics

Size	M23 Signal
Gender of required insert	Male/Female
Upper temperature	125 °C
Lower temperature	-40 °C
Connector locking system	Twilock
Protection degree	IP67/IP69K
Mating cycles	> 1000
Size flange	25x25 mm
Remark 1	Compatible with Speedtec

Material

Housing material	Copper-Zinc alloy, Die casting
Housing plating	Nickel plated