

# Product data sheet

## Binder connectors Female cable connector




### Plastic locking system, screw termination

UL-approval

99 0430 15 04

<https://www.ac-solutions.be/en/product/9904301504>

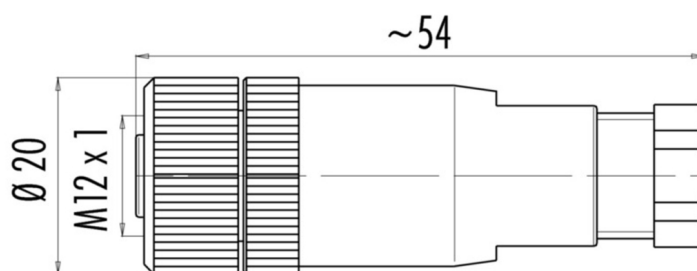

## Specifications

### General Characteristics

|                    |                      |
|--------------------|----------------------|
| Screw size         | M12-B                |
| Series             | Sensor               |
| Subseries          | 715                  |
| Gender             | Female               |
| Number of contacts | 4                    |
| Contact terminal   | Screw                |
| Upper temperature  | +85 °C               |
| Lower temperature  | -40 °C               |
| Protection degree  | IP67                 |
| Locking system     | Screw (M12-B)        |
| Mating cycles      | >50                  |
| Connector Diameter | 20 mm                |
| Cable outlet       | 4-6 mm               |
| Wire-section       | 0.75 mm <sup>2</sup> |

# Product data sheet

## Binder connectors Female cable connector



### Electrical parameters

|                         |        |
|-------------------------|--------|
| Nominal current         | 4 A    |
| Nominal voltage         | 250 V  |
| Impuls voltage          | 2500 V |
| Max. contact resistance | 8 m?   |
| Pollution degree        | 3      |
| Overvoltage categorie   | II     |

### Material

|                     |                                   |
|---------------------|-----------------------------------|
| Material group      | III                               |
| Material of insert  | PA                                |
| Material of housing | PA, zinc diecasting nickel plated |
| Material of contact | CuZn (Brass)                      |
| Plating             | CuSnZn (Optalloy)                 |