


Female angled panel mount connector

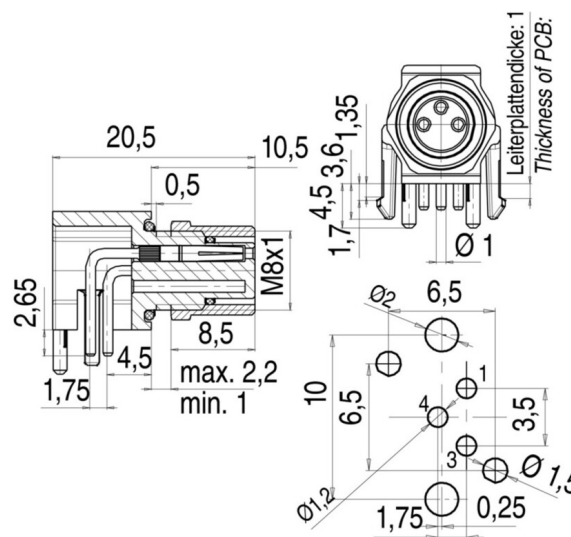

Product data sheet

Binder connectors

Female angled panel mount connector



Nominal voltage	30 V
Impuls voltage	800 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	II

Material

Material group	II
Material of insert	PA (UL 94 HB)
Material of housing	CuZn (Brass nickel plated)
Material of contact	CuSn (Bronze)
Plating	Au (Gold)