

Product data sheet


Binder connectors

Male angled panel mount connector



99 3391 282 04

<https://www.ac-solutions.be/en/product/99339128204>

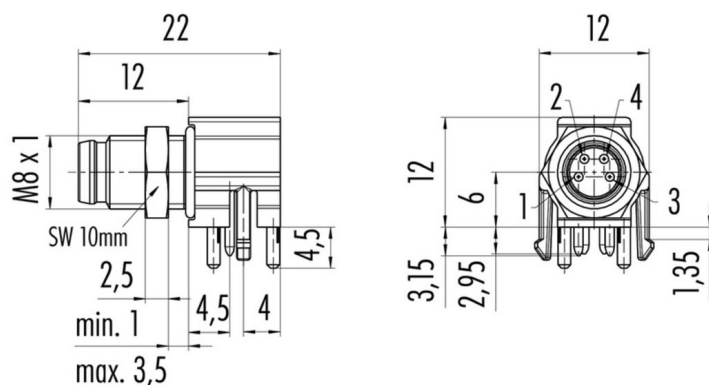

Leiterplattendicke: 1,5 mm
Thickness of PCB: 1,5 mm

Specifications

General Characteristics

Series	Sensor
Subseries	768-718
Gender	Male
Number of contacts	4
Contact terminal	Dip solder
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw, snap-in
Mating cycles	>100
Connector Diameter	12.6 mm

Electrical parameters

Nominal current	4 A
Nominal voltage	30 V
Impuls voltage	800 V
Max. contact resistance	3 m?
Pollution degree	3

Product data sheet

Binder connectors

Male angled panel mount connector



Overvoltage categorie	II
-----------------------	----

Material

Material group	II
Material of insert	PA (UL 94 HB)
Material of housing	Zinc diecasting nickel plated, PA
Material of contact	CuZn (Brass)
Plating	Au (Gold)