


Female receptacle

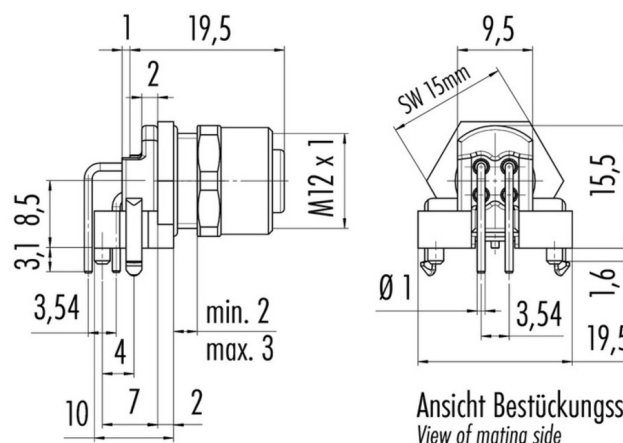

Ansicht Bestückungsseite
View of mating side

Leiterplattendicke: 1,6 mm
Thickness of PCB: 1,6 mm

Product data sheet

Binder connectors

Female receptacle



Nominal current	4 A
Nominal voltage	125 V
Impuls voltage	1500 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	II

Material

Material group	III
Material of insert	PA
Material of housing	CuZn (Brass nickel plated)
Material of contact	CuSn (Bronze)
Plating	Au (Gold)