


Product data sheet

Binder connectors Female cable connector



99 4706 00 03

<https://www.ac-solutions.be/en/product/9947060003>

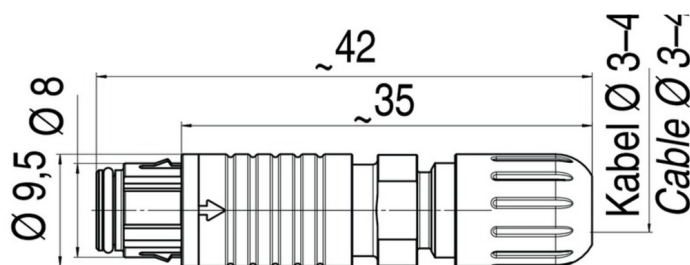

Specifications

General Characteristics

Series	Subminiature
Subseries	420
Gender	Female
Number of contacts	3
Contact terminal	Solder
Upper temperature	+80 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Micro Push-Pull
Mating cycles	>1000
Connector Diameter	9.5 mm
Cable outlet	3-4 mm
Wire-section	0.14 mm ²

Electrical parameters

Nominal current	1 A
Nominal voltage	125 V
Impuls voltage	1500 V

Product data sheet

Binder connectors

Female cable connector



Max. contact resistance	8 m?
Pollution degree	2
Overvoltage categorie	II

Material

Material group	II
Material of insert	PA
Material of housing	PA
Material of contact	CuSn (Bronze)
Plating	Au (Gold)