

Product data sheet

Binder connectors

Female panel mount connector




with Solder termination

Lightgrey

99 9108 400 03

<https://www.ac-solutions.be/en/product/99910840003>

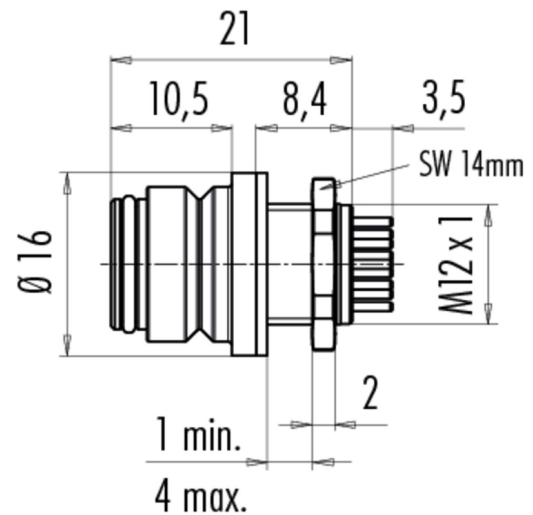

Specifications

General Characteristics

Series	Subminiature
Subseries	720 Medical
Gender	Female
Number of contacts	3
Contact terminal	Solder
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Snap-in
Connector Diameter	16 mm
Cable outlet	4-6 mm
Wire-section	0.75 mm ²

Electrical parameters

Product data sheet

Binder connectors

Female panel mount connector



Nominal current	7 A
Nominal voltage	250 V
Impuls voltage	2500 V
Max. contact resistance	3 m?
Pollution degree	2
Overvoltage categorie	II

Material

Material group	II
Material of insert	PA (UL 94 V-0)
Material of housing	PA (UL 94 V-0)
Material of contact	CuSn (Bronze)
Plating	Au (Gold)