

Product data sheet


Ilme connectors

bulkhead mounting housing, size 104.27, E-Xtreme alu, 2 levers



C7IE 24

<https://www.ac-solutions.be/en/product/c7ie24>

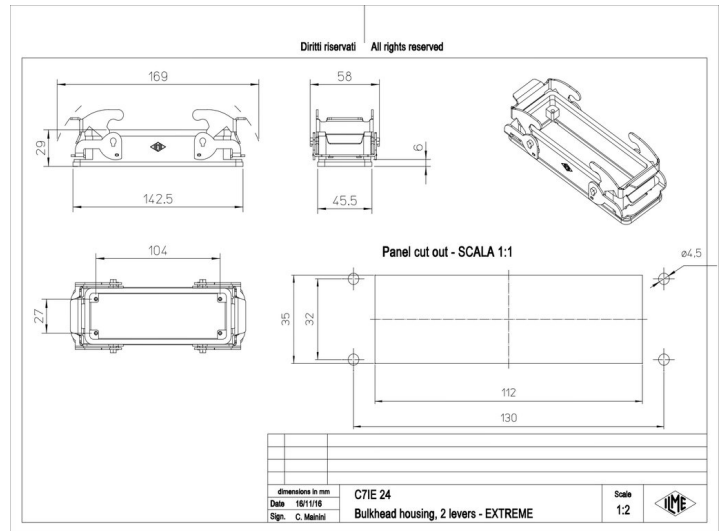

Specifications

General characteristics

Enclosure type	Bulkhead mounting housing
Size	104.27
Enclosure series	E-Xtreme® V-TYPE
Closing type	With 2 levers
Locking mechanism	Double locking levers
Protection degree	IP66 / IP67 / IP69
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	without cable entry
Position cable feed	Without cable entry
Height	29 mm
Width	45.5 mm
Length	142.5 mm
Remark	FKM gasket (-40°C...+180°C) or silicone gasket (-60°C...+180°C)

Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating

Product data sheet

Ilme connectors

bulkhead mounting housing, size 104.27, E-Xtreme alu, 2 levers



Inflammability class of insulation material acc. with UL94

V2