

Product data sheet


Ilme connectors

hood, high, size 104.27, C-TYPE alu, 2 levers, 1xPG21 top



CAV 24 X

<https://www.ac-solutions.be/en/product/cav24x>

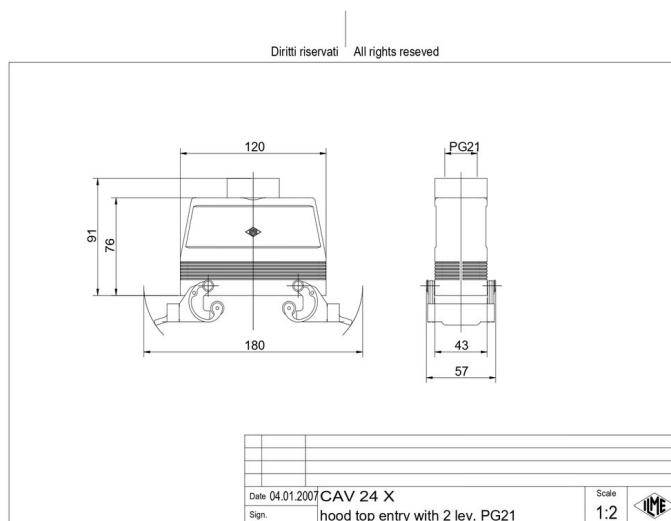

Specifications

General characteristics

Enclosure type	Hood
Size	104.27
Enclosure series	C-TYPE
Closing type	With 2 levers
Locking mechanism	Double locking levers
Protection degree	IP65 / IP66 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	top cable entry
Cable entry size	Pg21
Position cable feed	Top entry
Height	91 mm
Width	59 mm
Length	120 mm

Product data sheet

Ilme connectors

hood, high, size 104.27, C-TYPE alu, 2 levers, 1xPG21 top



Remark	May be combined with enclosures: CHI 24 CS,CHI 24 CP,CHI 24 C,CHP 24 CS,CHP 24 CP,CHP 24 C,CAP 24 CS,CAP 24 CP,CAP 24 C,MHP 24 CS,MHP 24 CP,MAP 24 CS,MAP 24 CP
--------	---

Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2
Extra information	Corrosion resistant,UV resistant,With interlocking device