

Product data sheet



Ilme connectors - CCE 48 P + PE

male insert, 24p+PE, crimp, 16A, 500V, for size 104.62 no.25-48



CCEM 24 N

<https://www.ac-solutions.be/en/product/ccem24n>

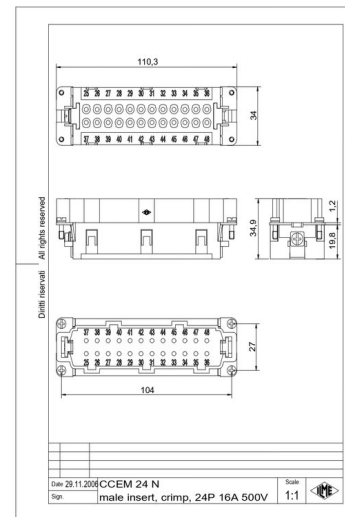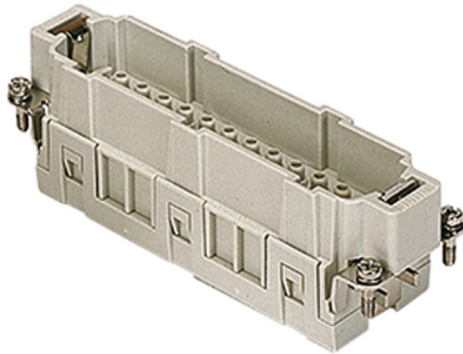

Specifications

General characteristics

Product Type	Standard insert
Insert series	CCE
Number of contacts	48 + PE (25-48)
Number of poles	48
Connection type	Crimp connection
Gender	Male
Size	104.62
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	26
AWG-range 2	12
Min. Cross section	0.14 mm ²
Max. Cross section	4 mm ²
Diameter male contact	2.5 mm
Pin numbers	25-48
Colour	Grey
Extra information	Contact insert without contacts

Product data sheet

Ilme connectors - CCE 48 P + PE

male insert, 24p+PE, crimp, 16A, 500V, for size 104.62 no.25-48



Remark	To be ordered with CCEM 24
--------	----------------------------

Electrical parameters

Max. rated current	16 A
Nominal rated voltage	500 V
Over voltage category	III
Rated surge voltage	6 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Inflammability class of insulation material acc. with UL94	V0