Product data sheet

Ilme connectors

female contact, 0,14-0,37mm², gold 2µm, crimp, 10A, series CD

CDF2D 0.3
https://www.ac-solutions.be/en/product/cdf2d03

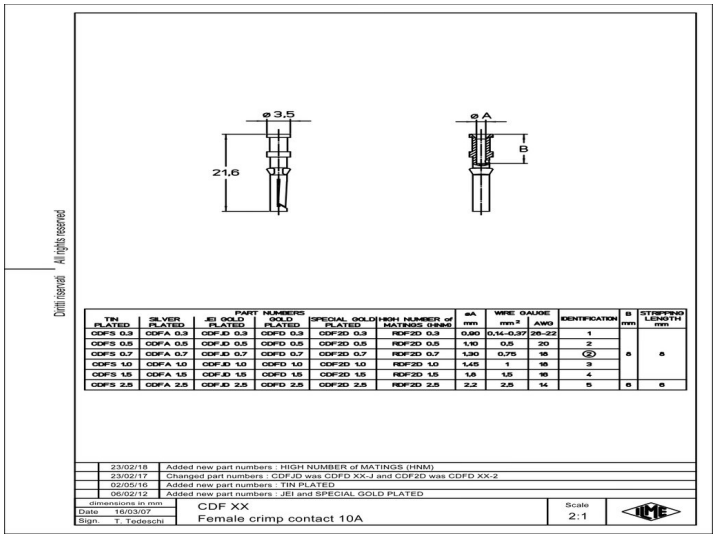

PART NUMBERS						ø A	WIRE GAUGE		IDENTIFICATION	B	STRIPPING LENGTH
TIN PLATED	SILVER PLATED	JEI GOLD PLATED	GOLD PLATED	SPECIAL GOLD PLATED	HIGH NUMBER of MATINGS (HNM)	mm	mm²	AWG		mm	mm
CDFS 0.3	CDFA 0.3	CDF.JD 0.3	CDFD 0.3	CDF2D 0.3	RDF2D 0.3	0,80	0,14-0,37	26-22	1	8	8
CDFS 0.5	CDFA 0.5	CDF.JD 0.5	CDFD 0.5	CDF2D 0.5	RDF2D 0.5	1,10	0,5	20	2		
CDFS 0.7	CDFA 0.7	CDF.JD 0.7	CDFD 0.7	CDF2D 0.7	RDF2D 0.7	1,30	0,75	18	2		
CDFS 1.0	CDFA 1.0	CDF.JD 1.0	CDFD 1.0	CDF2D 1.0	RDF2D 1.0	1,45	1	18	3		
CDFS 1.5	CDFA 1.5	CDF.JD 1.5	CDFD 1.5	CDF2D 1.5	RDF2D 1.5	1,8	1,5	16	4		
CDFS 2.5	CDFA 2.5	CDF.JD 2.5	CDFD 2.5	CDF2D 2.5	RDF2D 2.5	2,2	2,5	14	5	6	6

Specifications

General characteristics

Connection type	Turned crimp
Contact type (gender)	Female
Min. Cross section	0.14 mm²
Max. Cross section	0.37 mm²
AWG size	26 - 22
Identification	1
Diameter male contact	1.6 mm
Wire strip length	8 mm

Electrical parameters

Max. rated current	10 A

Material

Material contact	Copper alloy
Plating of contact	Gold