

Product data sheet


Ilme connectors - CMCE 32 P + 4 P + PE

male insert, size 104.62, 16+2p+PE, crimp, 16A, 400/690V, no.17-32



CMCEM 16 N

<https://www.ac-solutions.be/en/product/cmcem16n>

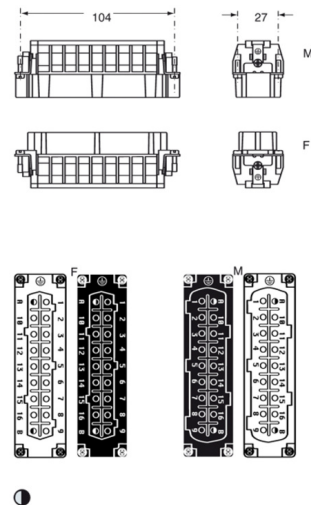

Specifications

General characteristics

Product Type	Standard insert
Insert series	CMCE
Number of contacts	32 + 4 + PE (17-32)
Number of poles	32 + 4 + PE
Connection type	Crimp connection
Gender	Male
Size	104.62
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	26
AWG-range 2	12
Min. Cross section	0.14 mm ²
Max. Cross section	4 mm ²
Diameter male contact	2.5 mm
Pin numbers	17-32
Colour	Black
Remark	To be ordered with CMCEM 16

Product data sheet

Ilme connectors - CMCE 32 P + 4 P + PE

male insert, size 104.62, 16+2p+PE, crimp, 16A, 400/690V, no.17-32



Electrical parameters

Max. rated current	16 A
Nominal rated voltage	400/690 V
Rated surge voltage	6 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Inflammability class of insulation material acc. with UL94	V0