

Product data sheet


Ilme connectors - CME 6 P + 2 P + PE

female insert, size 77.27, 6+2p+PE, screw, 16A, 830V




CMEF 06 TX


<https://www.ac-solutions.be/en/product/cmef06tx>

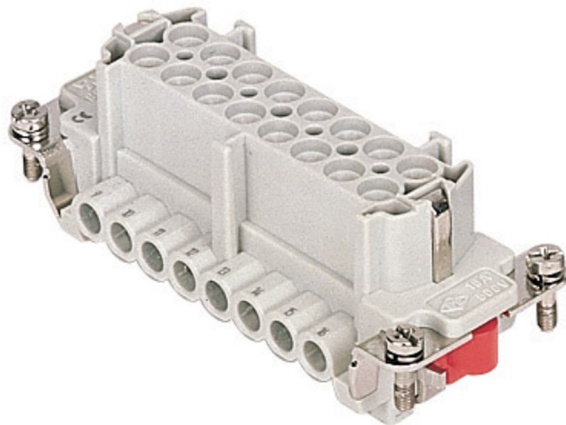

CMEM 06



CMEF 06



Specifications

General characteristics

Product Type	Standard insert
Insert series	CME
Number of contacts	6 + 2 + PE
Number of poles	6 + 2 + PE
Connection type	Screw terminal connection
Gender	Female
Size	77.27
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	24
AWG-range 2	14
Min. Cross section	0.25 mm ²
Max. Cross section	2.5 mm ²
Colour	Grey

Electrical parameters

Max. rated current	16 A
Nominal rated voltage	830 V

Product data sheet

Ilme connectors - CME 6 P + 2 P + PE

female insert, size 77.27, 6+2p+PE, screw, 16A, 830V



Rated surge voltage	8 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Material contact	Copper alloy
Plating of contact	Silver
Inflammability class of insulation material acc. with UL94	V0