

Product data sheet


Ilme connectors - CQEY 64 P + PE

male insert, 77.62, 32+PE, AXYR® push-in connection, 16A, 500V, no.33-64



CQEYM 32 N

<https://www.ac-solutions.be/en/product/cqeym32n>

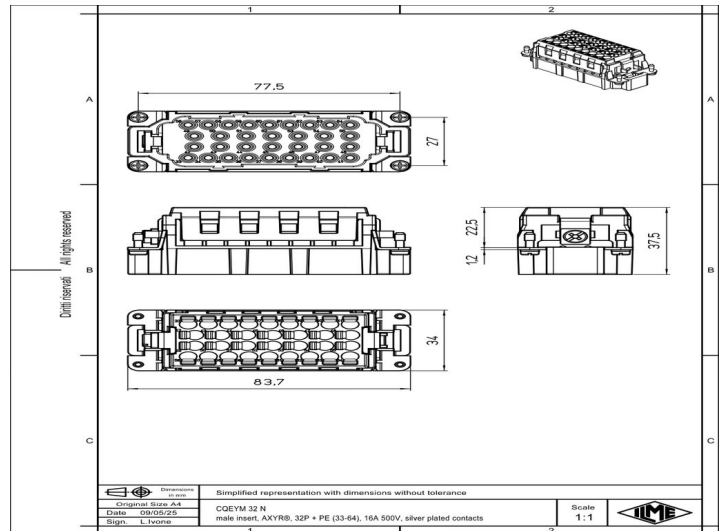

Specifications

General characteristics

Product Type	Standard insert
Insert series	CQEY
Number of contacts	64 + PE (33-64)
Number of poles	64 + PE
Connection type	AXYR® high density spring terminal connection without tools
Gender	Male
Size	77.62
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	24
AWG-range 2	12
Min. Cross section	0.25 mm ²
Max. Cross section	4 mm ²
Pin numbers	33-64
Colour	Grey
Remark	To be ordered with CQEYM 32

Electrical parameters

Product data sheet

Ilme connectors - CQEY 64 P + PE

male insert, 77.62, 32+PE, AXYR® push-in connection, 16A, 500V, no.33-64



Max. rated current	16 A
Nominal rated voltage	500 V
Rated surge voltage	6 kV
Pollution degree	3

Material

Material insert	Polycarbonate (PC)
Material contact	Copper alloy
Plating of contact	Silver
Inflammability class of insulation material acc. with UL94	V0