

Product data sheet



Ilme connectors - CSH S 24 P + PE

male insert, size 104.27, 24p+PE, SQUICH, 16A, 500V



CSHM 24 S

<https://www.ac-solutions.be/en/product/cshm24s>

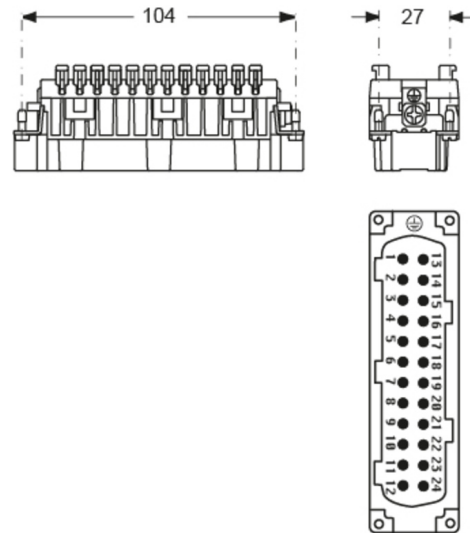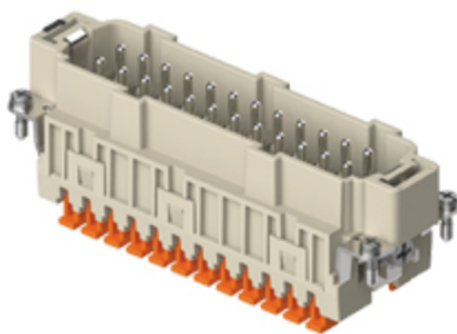

Specifications

General characteristics

Product Type	Standard insert
Insert series	CSH S
Number of contacts	24 + PE
Number of poles	24 + PE
Connection type	SQUICH® spring terminal connection without tools
Gender	Male
Size	104.27
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	26
AWG-range 2	14
Min. Cross section	0.14 mm ²
Max. Cross section	2.5 mm ²
Colour	Grey

Electrical parameters

Max. rated current	16 A
Nominal rated voltage	500 V

Product data sheet

Ilme connectors - CSH S 24 P + PE

male insert, size 104.27, 24p+PE, SQUICH, 16A, 500V



Rated surge voltage	6 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Material contact	Copper alloy
Plating of contact	Silver
Inflammability class of insulation material acc. with UL94	V0