

Product data sheet



Ilme connectors - CSH S 48 P + PE

male insert, size 104.62, 24p+PE, SQUICH, 16A, 500V, no.25-48



CSHM 24 SN

<https://www.ac-solutions.be/en/product/cshm24sn>

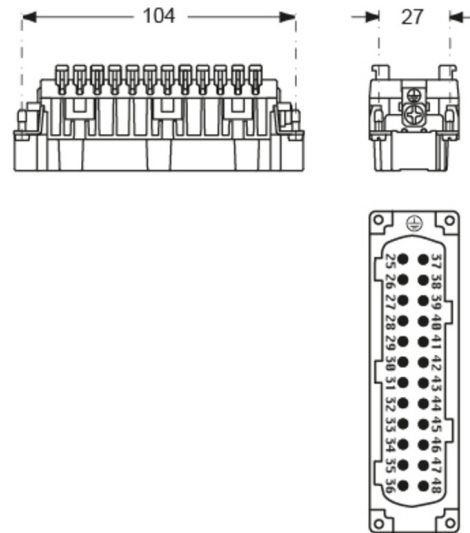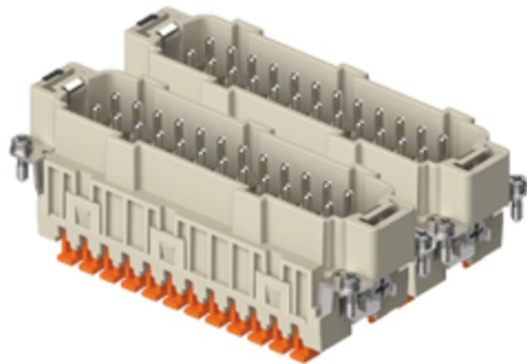

Specifications

General characteristics

Product Type	Standard insert
Insert series	CSH S
Number of contacts	48 + PE (25-48)
Number of poles	48 + PE
Connection type	SQUICH® spring terminal connection without tools
Gender	Male
Size	104.62
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	26
AWG-range 2	14
Min. Cross section	0.14 mm ²
Max. Cross section	2.5 mm ²
Pin numbers	25-48
Colour	Grey
Remark	To be ordered with CSHM 24 S

Electrical parameters

Product data sheet

Ilme connectors - CSH S 48 P + PE

male insert, size 104.62, 24p+PE, SQUICH, 16A, 500V, no.25-48



Max. rated current	16 A
Nominal rated voltage	500 V
Rated surge voltage	6 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Material contact	Copper alloy
Plating of contact	Silver
Inflammability class of insulation material acc. with UL94	V0