

# Product data sheet


## Ilme connectors

bulkhead mounting housing, size 57.27, V-TYPE alu, 1 lever, spring cover



CVI 10 LSP

<https://www.ac-solutions.be/en/product/cvi10lsp>

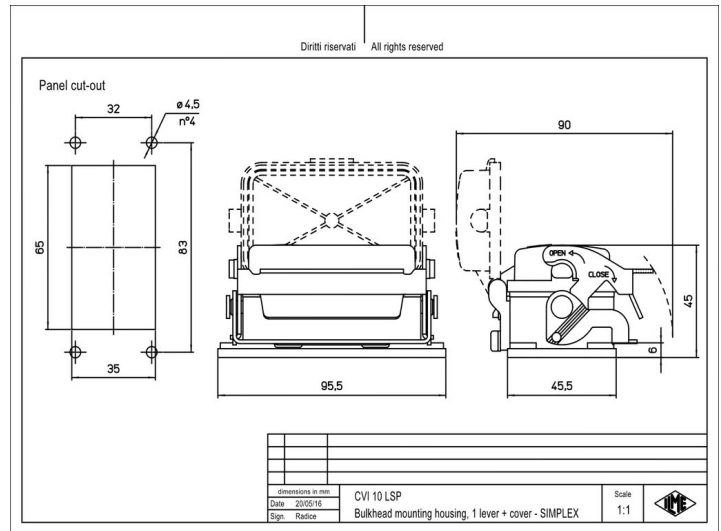

## Specifications

### General characteristics

|                             |                           |
|-----------------------------|---------------------------|
| Enclosure type              | Bulkhead mounting housing |
| Size                        | 57.27                     |
| Enclosure series            | V-TYPE                    |
| Closing type                | With 1 lever              |
| Locking mechanism           | Single locking lever      |
| Protection degree           | IP65                      |
| Ambient lower temperature   | -40 °C                    |
| Ambient upper temperature   | 125 °C                    |
| Operation lower temperature | -40 °C                    |
| Operation upper temperature | 125 °C                    |
| Cable entry type            | without cable entry       |
| Position cable feed         | Without cable entry       |
| Height                      | 45 mm                     |
| Width                       | 45.5 mm                   |
| Length                      | 95.5 mm                   |

### Material

|                  |                          |
|------------------|--------------------------|
| Material housing | Die cast aluminium alloy |
|------------------|--------------------------|

# Product data sheet

## Ilme connectors

bulkhead mounting housing, size 57.27, V-TYPE alu, 1 lever, spring cover



|                                                            |                                                                           |
|------------------------------------------------------------|---------------------------------------------------------------------------|
| Coating housing                                            | With epoxy-polyester thermosetting powder coating                         |
| Inflammability class of insulation material acc. with UL94 | V2                                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With hinged lid,With interlocking device |