

Product data sheet


Ilme connectors

male shielded connector, MIXO, 4p, crimp, 10A, 50V, BUS



CX 04 BM

<https://www.ac-solutions.be/en/product/cx04bm>

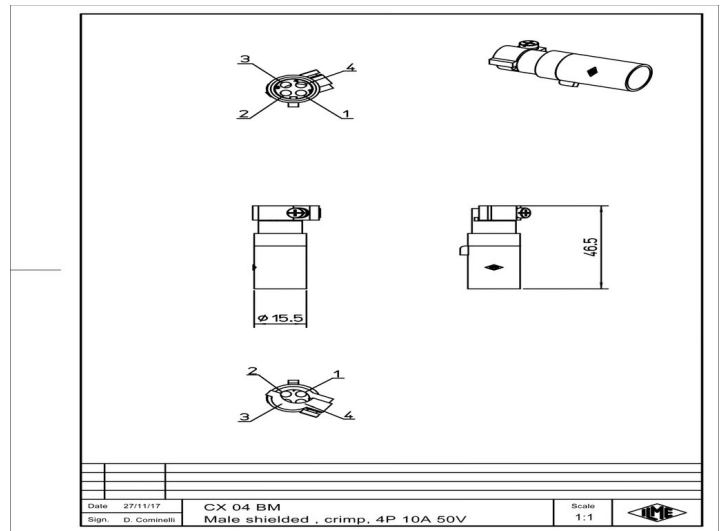

Specifications

General characteristics

Product type	Modular insert
Insert series	Mixo Bus
Number of contacts	4
Connection type	Coaxial
Gender	Male
Number of module slots	2
Operation lower temperature	-40 °C
Operation upper temperature	85 °C
AWG-range 1	26
AWG-range 2	14
Min. Cross section	0.14 mm ²
Max. Cross section	2.5 mm ²
Colour	Grey
Extra information	Contact insert without contacts
Remark 2	To be used with CX 02 BM

Electrical parameters

Max. rated current	10 A
--------------------	------

Product data sheet

Ilme connectors

male shielded connector, MIXO, 4p, crimp, 10A, 50V, BUS



Nominal rated voltage	50 V
Over voltage category	III
Rated surge voltage	0.8 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Inflammability class of insulation material acc. with UL94	V0