

Product data sheet


Ilme connectors

male insert, MIXO, 1MU, 4p, crimp, 40A, 830V



CX 04 XM

<https://www.ac-solutions.be/en/product/cx04xm>

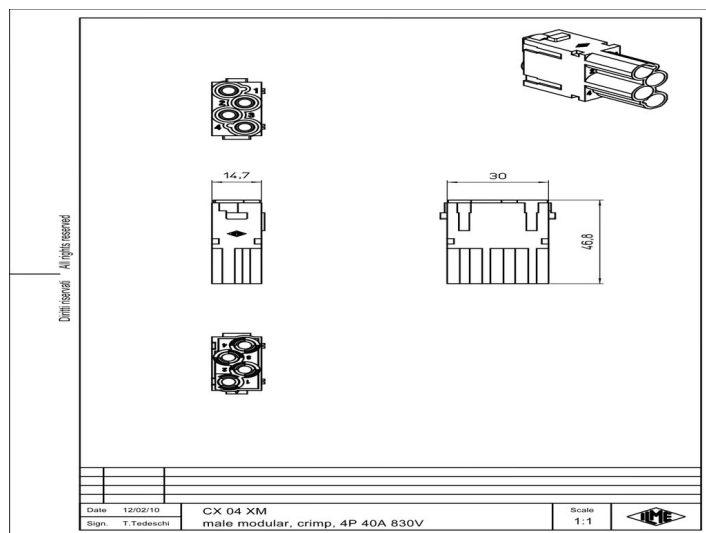

Specifications

General characteristics

Product type	Modular insert
Insert series	Mixo
Number of contacts	4
Connection type	Crimp connection
Gender	Male
Number of module slots	1
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	16
AWG-range 2	10
Min. Cross section	1.5 mm ²
Max. Cross section	6 mm ²
Diameter male contact	4 mm
Colour	Grey
Extra information	Contact insert without contacts, Modular Version
Remark	Only for bulkhead mounting housings, Surface high construction housings or high construction hoods

Electrical parameters

Product data sheet

Ilme connectors

male insert, MIXO, 1MU, 4p, crimp, 40A, 830V



Max. rated current	40 A
Nominal rated voltage	830 V
Over voltage category	III
Rated surge voltage	8 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Inflammability class of insulation material acc. with UL94	V0