

# Product data sheet


## Ilme connectors

male contact, 10mm<sup>2</sup>, silver, crimp, 70A, series CX7, IP2X IPXXB, for modul CX 02 7M



CX7MA 10 P

<https://www.ac-solutions.be/en/product/cx7ma10p>

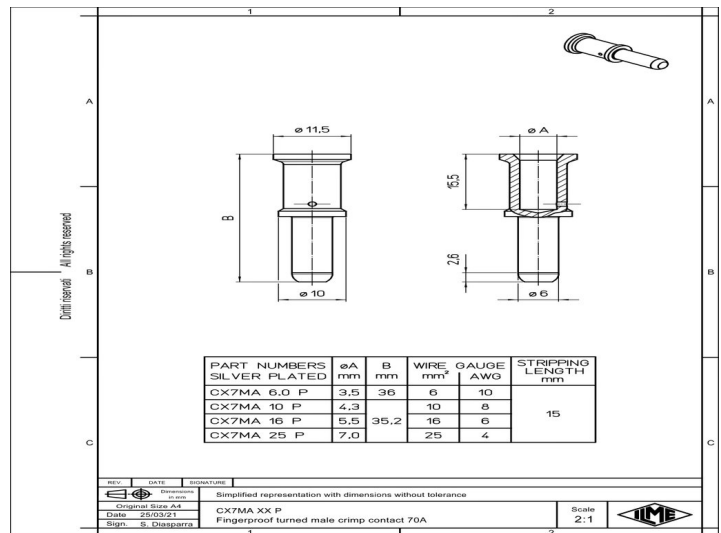

## Specifications

### General characteristics

|                           |                    |
|---------------------------|--------------------|
| Connection type           | Turned crimp       |
| Contact type (gender)     | Male               |
| Ambient lower temperature | -40 °C             |
| Ambient upper temperature | 125 °C             |
| Min. Cross section        | 10 mm <sup>2</sup> |
| Max. Cross section        | 10 mm <sup>2</sup> |
| AWG size                  | 8 - 7              |
| Diameter male contact     | 6 mm               |
| Wire strip length         | 15 mm              |

### Electrical parameters

|                    |      |
|--------------------|------|
| Max. rated current | 70 A |
|--------------------|------|

### Material

|                    |              |
|--------------------|--------------|
| Material contact   | Copper alloy |
| Plating of contact | Silver       |