

Product data sheet





Ilme connectors - CX 9 P + 42 P + PE

male insert, size 77.27, 9+42p+PE, crimp, 40+10A, 690+250V



CXM 9/42

<https://www.ac-solutions.be/en/product/cxm942>

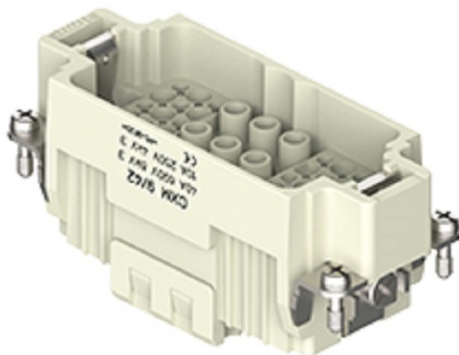

Specifications

General characteristics

Product Type	Standard insert
Insert series	CX
Number of contacts	9 + 42 + PE
Number of poles	9 + 42 + PE
Connection type	Crimp connection
Gender	Male
Size	77.27
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	16
AWG-range 2	10
Min. Cross section	1.5 mm ²
Max. Cross section	6 mm ²
Diameter male contact	9P: 4, 42P: 1,6 mm
Colour	Grey

Electrical parameters

Max. rated current	40 A
--------------------	------

Product data sheet

Ilme connectors - CX 9 P + 42 P + PE

male insert, size 77.27, 9+42p+PE, crimp, 40+10A, 690+250V



Nominal rated voltage	690 V
Rated surge voltage	8 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Inflammability class of insulation material acc. with UL94	V0