

# Product data sheet


## Ilme connectors

bulkhead mounting housing, size 66.16, CZ7 alu, 1 rigid lever



CZ7I 25 L

<https://www.ac-solutions.be/en/product/cz7i25l>

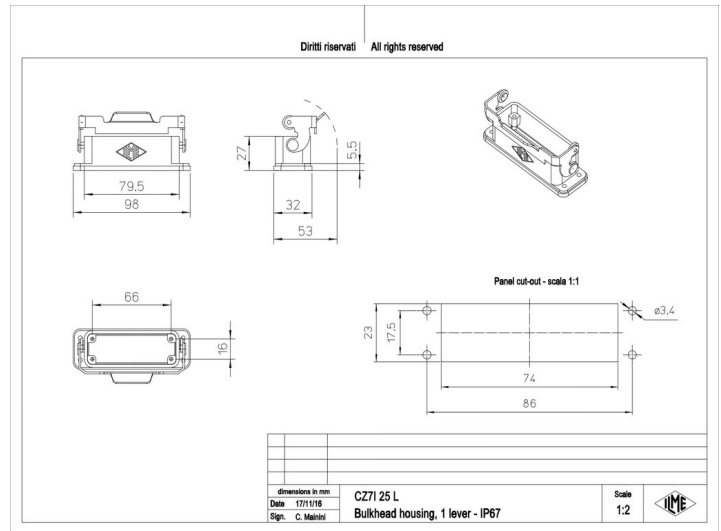

## Specifications

### General characteristics

|                             |                           |
|-----------------------------|---------------------------|
| Enclosure type              | Bulkhead mounting housing |
| Size                        | 66.16                     |
| Enclosure series            | CZ7                       |
| Closing type                | With 1 lever              |
| Locking mechanism           | Single locking lever      |
| Protection degree           | IP66 / IP67 / IP69        |
| Ambient lower temperature   | -40 °C                    |
| Ambient upper temperature   | 125 °C                    |
| Operation lower temperature | -40 °C                    |
| Operation upper temperature | 125 °C                    |
| Cable entry type            | without cable entry       |
| Position cable feed         | Without cable entry       |
| Height                      | 27 mm                     |
| Width                       | 32 mm                     |
| Length                      | 98 mm                     |

### Material

|                  |                          |
|------------------|--------------------------|
| Material housing | Die cast aluminium alloy |
|------------------|--------------------------|

# Product data sheet

## Ilme connectors

bulkhead mounting housing, size 66.16, CZ7 alu, 1 rigid lever



|                                                            |                                                   |
|------------------------------------------------------------|---------------------------------------------------|
| Coating housing                                            | With epoxy-polyester thermosetting powder coating |
| Inflammability class of insulation material acc. with UL94 | V2                                                |