

# Product data sheet

## Higo connectors - F621A



### Male panel mount connector



## Push-on flexible

F621AG C 03 GA 0150

<https://www.ac-solutions.be/en/product/f621agc03ga0150>

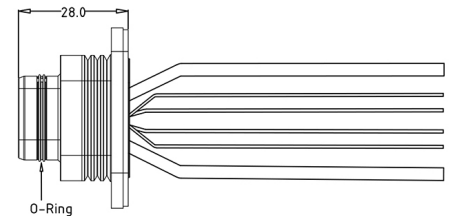

## Specifications

### General Characteristics

|                    |                                    |
|--------------------|------------------------------------|
| Number of contacts | 6 (2+4)                            |
| Connector shape    | Panel mount                        |
| Gender             | Male                               |
| Color              | Black                              |
| Upper temperature  | 80 °C                              |
| Lower temperature  | -25 °C                             |
| IP Protection      | IP67                               |
| Locking            | Push-on flexible                   |
| Mating cycles      | 3000 Times                         |
| Connector diameter | 46,0 x 18,0 mm                     |
| Cable Length       | 150 mm                             |
| Wire section       | 2 x 3,3 + 4 x 0,2                  |
| Remark             | Other cable length/type on request |

# Product data sheet

## Higo connectors - F621A

Male panel mount connector



### Electrical Parameters

|                            |                   |
|----------------------------|-------------------|
| Rated current              | 30 / 2 A          |
| Rated voltage              | 48 V AC / 60 V DC |
| Max. insulation resistance | ?20 M?            |
| Max. contact resistance    | ?10 m?            |

### Material

|                     |                 |
|---------------------|-----------------|
| Insulation wire     | PVC             |
| Material of contact | Phosphor Bronze |
| Contact plating     | Silver plated   |