

Product data sheet

Higo connectors - Mini C


Mini C male panel mount connector



Screw Locking

L609CG C 03 00 0300

<https://www.ac-solutions.be/en/product/l609cgc03000300>

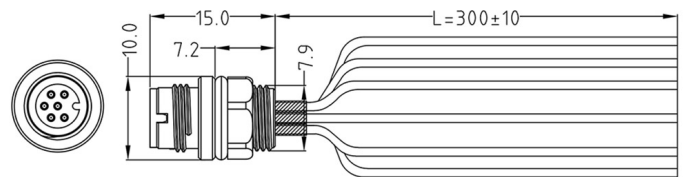

Specifications

General Characteristics

Number of contacts	6
Connector shape	Panel mount
Gender	Male
Color	Purple
Upper temperature	80 °C
Lower temperature	-25 °C
IP Protection	IP67
Mating cycles	200 Times
Connector diameter	10,0 mm
Cable Length	300 mm
Wire section	6 x 0,2 mm ²
Remark	Other cable length/type on request

Product data sheet

Higo connectors - Mini C

Mini C male panel mount connector



Electrical Parameters

Rated current	2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance	?20 M?
Max. contact resistance	?10 m?

Material

Insulation wire	PVC
Material of contact	Phosphor Bronze
Contact plating	Gold over Nickel