
# Product data sheet

## ILME connectors

### hood, high, size 44.27, alu, central lever, 1xM25 side

MAO 06 YX25
https://www.ac-solutions.be/en/product/mao06yx25



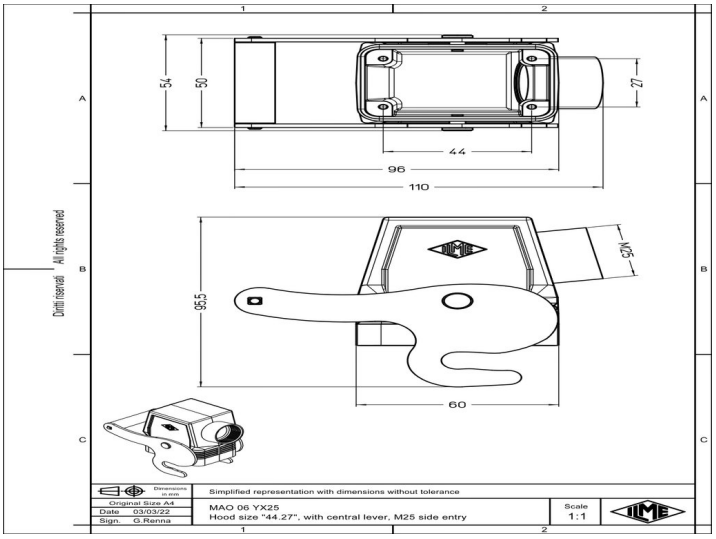


# Specifications

## General characteristics

| | |
|---|---|
| **Enclosure type** | Hood |
| **Size** | 44.27 |
| **Enclosure series** | CENTRAL LEVER |
| **Closing type** | With 1 lever |
| **Locking mechanism** | Central lever |
| **Protection degree** | IP65 / IP66 / IP69 |
| **Ambient lower temperature** | -40 °C |
| **Ambient upper temperature** | 125 °C |
| **Operation lower temperature** | -40 °C |
| **Operation upper temperature** | 125 °C |
| **Cable entry type** | side cable entry with adapter |
| **Cable entry size** | M25 |
| **Position cable feed** | Side entry |
| **Height** | 72 mm |
| **Width** | 43 mm |
| **Length** | 60 mm |

## Material

# Product data sheet

## ILME connectors

### hood, high, size 44.27, alu, central lever, 1xM25 side

| | |
|---|---|
| **Material housing** | Die cast aluminium alloy |
| **Coating housing** | With epoxy-polyester thermosetting powder coating |
| **Inflammability class of insulation material acc. with UL94** | V2 |
| **Extra information** | Corrosion resistant,UV resistant,With interlocking device |