

# Product data sheet


## Ilme connectors

hood, size 77.27, BIG alu, 4 pegs, 3xM25 top, extended terminal compartment



MBV 16.325

<https://www.ac-solutions.be/en/product/mbv16325>

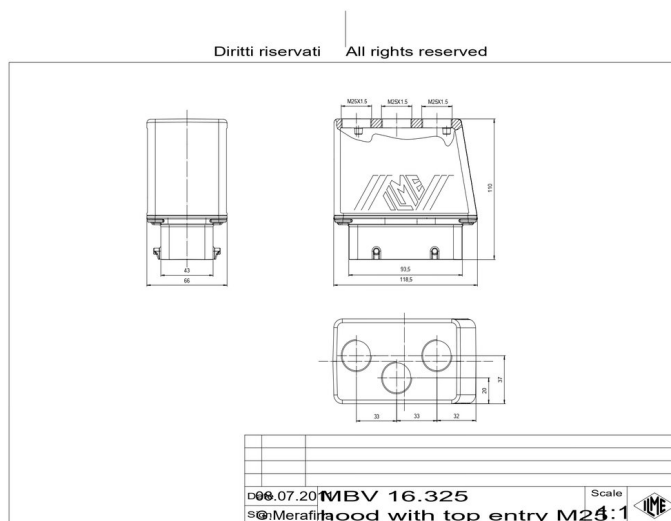

## Specifications

### General characteristics

|                             |                       |
|-----------------------------|-----------------------|
| Enclosure type              | Hood                  |
| Size                        | 77.27                 |
| Enclosure series            | BIG                   |
| Closing type                | With 4 pegs           |
| Locking mechanism           | Double locking levers |
| Protection degree           | IP66                  |
| Ambient lower temperature   | -40 °C                |
| Ambient upper temperature   | 125 °C                |
| Operation lower temperature | -40 °C                |
| Operation upper temperature | 125 °C                |
| Cable entry type            | 3 top cable entries   |
| Cable entry size            | M25 x 3               |
| Position cable feed         | Top entry             |
| Height                      | 110 mm                |
| Width                       | 66 mm                 |
| Length                      | 118.5 mm              |

### Material

# Product data sheet

## Ilme connectors

hood, size 77.27, BIG alu, 4 pegs, 3xM25 top, extended terminal compartment



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating         |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |