

Product data sheet


Ilme connectors

hood, high, size 44.27, E-Xtreme alu, 2 pegs, 1xM32 top, no adaptor



MFVE 06 L32M

<https://www.ac-solutions.be/en/product/mfve06l32m>

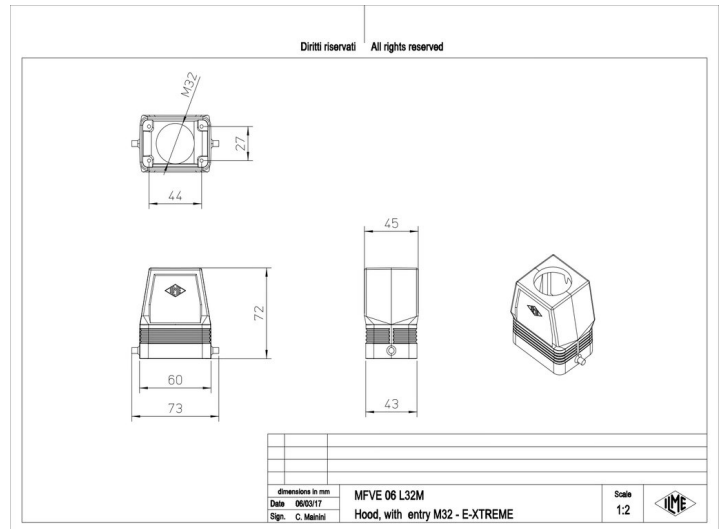

Specifications

General characteristics

Enclosure type	Hood
Size	44.27
Enclosure series	E-Xtreme® V-TYPE
Closing type	With 2 pegs
Locking mechanism	Single locking lever
Protection degree	IP66 / IP67 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	top cable entry
Cable entry size	M32
Position cable feed	Top entry
Height	72 mm
Width	43 mm
Length	60 mm
Remark	Enclosures without adaptor, threaded on the body, to be used only with a complete cable gland

Product data sheet

Ilme connectors

hood, high, size 44.27, E-Xtreme alu, 2 pegs, 1xM32 top, no adaptor



Remark 2

FKM gasket (-40°C...+180°C) or silicone gasket (-60°C...+180°C)

Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2