

Product data sheet


Ilme connectors

hood, size 104.27, IP68 alu, bayonet locking, 1xM50 top



MGV 24.50 B

<https://www.ac-solutions.be/en/product/mgv2450b>

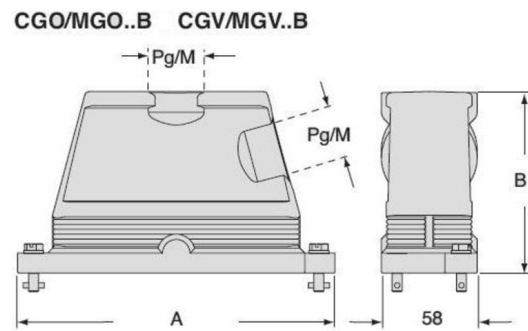

		A	B
CGO/MGO	CGV/MGV 06 B	133	101
CGO/MGO	CGV/MGV 10 B	146	101
CGO/MGO	CGV/MGV 16 B	166	111
CGO/MGO	CGV/MGV 24 B	193	111

Specifications

General characteristics

Enclosure type	Hood
Size	104.27
Enclosure series	IP68
Closing type	With 2 bayonets
Locking mechanism	With 2 bayonets
Protection degree	IP66 / IP68 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	top cable entry
Cable entry size	M50
Position cable feed	Top entry
Height	111 mm
Width	58 mm
Length	193 mm

Material

Product data sheet

Ilme connectors

hood, size 104.27, IP68 alu, bayonet locking, 1xM50 top



Material housing	Die cast aluminium alloy
Coating housing	With epoxy thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2
Extra information	Corrosion resistant,UV resistant,With interlocking device