

# Product data sheet


## Ilme connectors

surface mounting housing, size 66.40, C-TYPE alu, 2 levers, 1xM40 side




MHP 50.40


<https://www.ac-solutions.be/en/product/mhp5040>

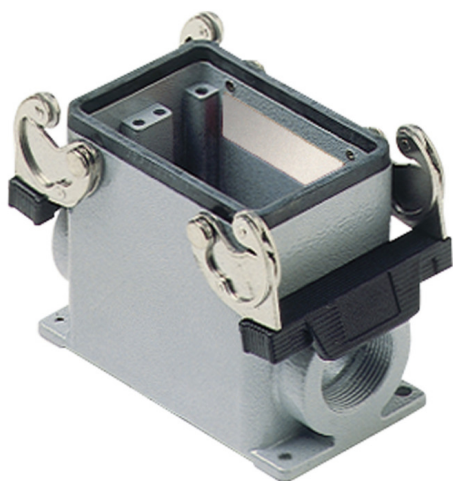

CHP - MHP

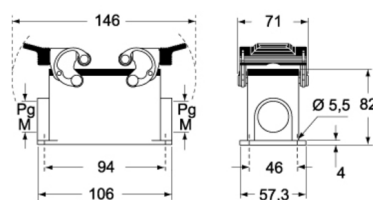

CHP CS - MHP CS

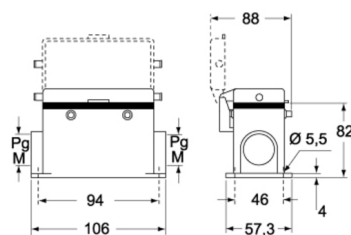

## Specifications

### General characteristics

|                             |                          |
|-----------------------------|--------------------------|
| Enclosure type              | Surface mounting housing |
| Size                        | 66.40                    |
| Enclosure series            | C-TYPE                   |
| Closing type                | With 2 levers            |
| Locking mechanism           | Double locking levers    |
| Protection degree           | IP65 / IP66 / IP69       |
| Ambient lower temperature   | -40 °C                   |
| Ambient upper temperature   | 125 °C                   |
| Operation lower temperature | -40 °C                   |
| Operation upper temperature | 125 °C                   |
| Cable entry type            | side cable entry         |
| Cable entry size            | M40                      |
| Position cable feed         | Side entry               |
| Height                      | 82 mm                    |
| Width                       | 71 mm                    |
| Length                      | 106 mm                   |

### Material

# Product data sheet

## Ilme connectors

surface mounting housing, size 66.40, C-TYPE alu, 2 levers, 1xM40 side



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating         |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |