

# Product data sheet



## IIme connectors

surface mounting housing, angled, size 21.21, zinc, 1 lever steel, 1xM25 side, closed bottom



MKA AP25

<https://www.ac-solutions.be/en/product/mkaap25>

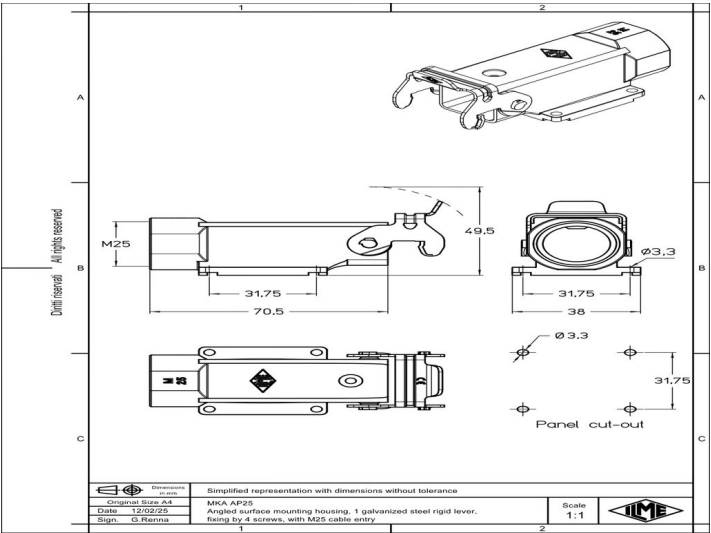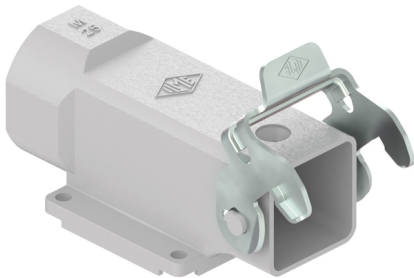

## Specifications

### General characteristics

|                             |                                 |
|-----------------------------|---------------------------------|
| Enclosure type              | Angled surface mounting housing |
| Size                        | 21.21                           |
| Enclosure series            | CKA                             |
| Closing type                | With 1 lever                    |
| Locking mechanism           | Single locking lever            |
| Protection degree           | IP44   IP66 / IP67 / IP69       |
| Ambient lower temperature   | -40 °C                          |
| Ambient upper temperature   | 125 °C                          |
| Operation lower temperature | -40 °C                          |
| Operation upper temperature | 125 °C                          |
| Cable entry type            | side cable entry                |
| Cable entry size            | M25                             |
| Position cable feed         | Side entry                      |
| Height                      | 49.5 mm                         |
| Width                       | 38 mm                           |
| Length                      | 70.5 mm                         |

## Material

# Product data sheet

## Ilme connectors

surface mounting housing, angled, size 21.21, zinc, 1 lever steel, 1xM25 side, closed bottom



|                  |                                                   |
|------------------|---------------------------------------------------|
| Material housing | Zinc die-cast                                     |
| Coating housing  | With epoxy-polyester thermosetting powder coating |