

# Product data sheet


## Ilme connectors

bulkhead mounting housing, angled, size 21.21, 180°C zinc, 1 lever stainless steel, 1xM20 side



MKAXR IAP20

<https://www.ac-solutions.be/en/product/mkaxriap20>

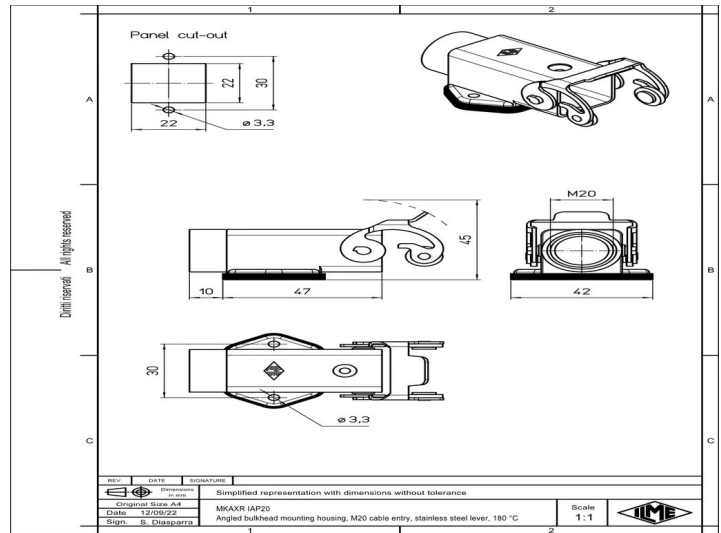

## Specifications

### General characteristics

|                             |                                  |
|-----------------------------|----------------------------------|
| Enclosure type              | Angled bulkhead mounting housing |
| Size                        | 21.21                            |
| Enclosure series            | 180°C                            |
| Closing type                | With 1 lever                     |
| Locking mechanism           | Single locking lever             |
| Protection degree           | IP44                             |
| Ambient lower temperature   | -40 °C                           |
| Ambient upper temperature   | 180 °C                           |
| Operation lower temperature | -40 °C                           |
| Operation upper temperature | 180 °C                           |
| Cable entry type            | side cable entry                 |
| Cable entry size            | M20                              |
| Position cable feed         | Side entry                       |
| Height                      | 45 mm                            |
| Width                       | 42.5 mm                          |
| Length                      | 53 mm                            |

## Material

# Product data sheet

## Ilme connectors

bulkhead mounting housing, angled, size 21.21, 180°C zinc, 1 lever stainless steel, 1xM20 side



|                                                            |                                                                                     |
|------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                                            |
| Coating housing                                            | With special thermosetting powder coating with high resistance to high temperatures |
| Inflammability class of insulation material acc. with UL94 | V2                                                                                  |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device                           |