

# Product data sheet


## Ilme connectors

surface mounting housing, size 44.27, IL-BRID stainless steel, 1 lever, 1xM25 side



MLAP 06 L25

<https://www.ac-solutions.be/en/product/mlap06l25>

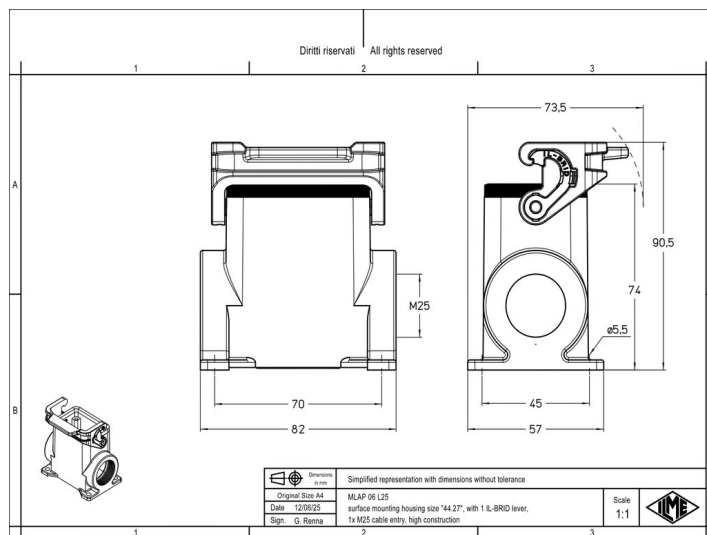

## Specifications

### General characteristics

|                             |                          |
|-----------------------------|--------------------------|
| Enclosure type              | Surface mounting housing |
| Size                        | 44.27                    |
| Enclosure series            | IL-BRID                  |
| Closing type                | With 1 lever             |
| Locking mechanism           | Single locking lever     |
| Protection degree           | IP65 / IP66 / IP69       |
| Ambient lower temperature   | -40 °C                   |
| Ambient upper temperature   | 125 °C                   |
| Operation lower temperature | -40 °C                   |
| Operation upper temperature | 125 °C                   |
| Cable entry type            | side cable entry         |
| Cable entry size            | M25                      |
| Position cable feed         | Side entry               |
| Height                      | 90.5 mm                  |
| Width                       | 57 mm                    |
| Length                      | 82 mm                    |

## Material

# Product data sheet

## Ilme connectors

surface mounting housing, size 44.27, IL-BRID stainless steel, 1 lever, 1xM25 side



SOLUTIONS

Material housing

Stainless steel