

Product data sheet


Ilme connectors

hood, size 66.16, E-Xtreme alu, 2 pegs stainless steel, 1xM20 top



MZVE 25 L20

<https://www.ac-solutions.be/en/product/mzve25l20>

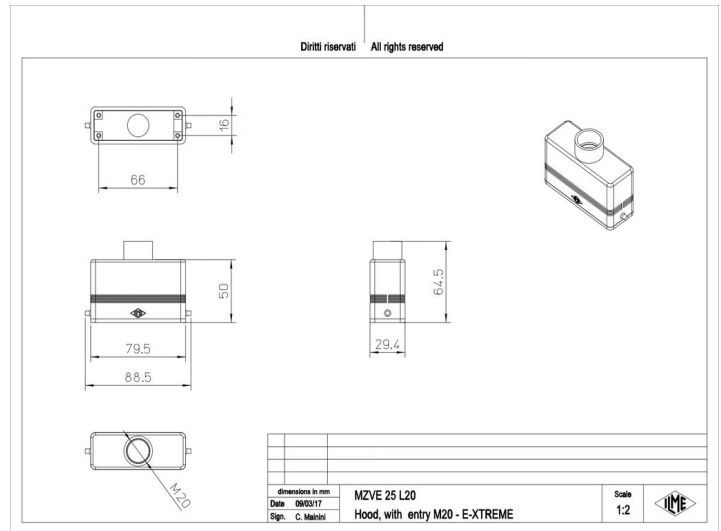

Specifications

General characteristics

Enclosure type	Hood
Size	66.16
Enclosure series	E-Xtreme® CZ7
Closing type	With 2 pegs
Locking mechanism	Single locking lever
Protection degree	IP66 / IP67 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	top cable entry
Cable entry size	M20
Position cable feed	Top entry
Height	64.5 mm
Width	29.4 mm
Length	79.5 mm
Remark	Can only be used with a complete cable gland

Product data sheet

Ilme connectors

hood, size 66.16, E-Xtreme alu, 2 pegs stainless steel, 1xM20 top



Remark 2

FKM gasket (-40°C...+180°C) or silicone gasket (-60°C...+180°C)

Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2