


Joint connector panel-mounted, screw with wire protector



M20, IP68/IP69

THB.391.H2C.L

<https://www.ac-solutions.be/en/product/thb391h2cl>

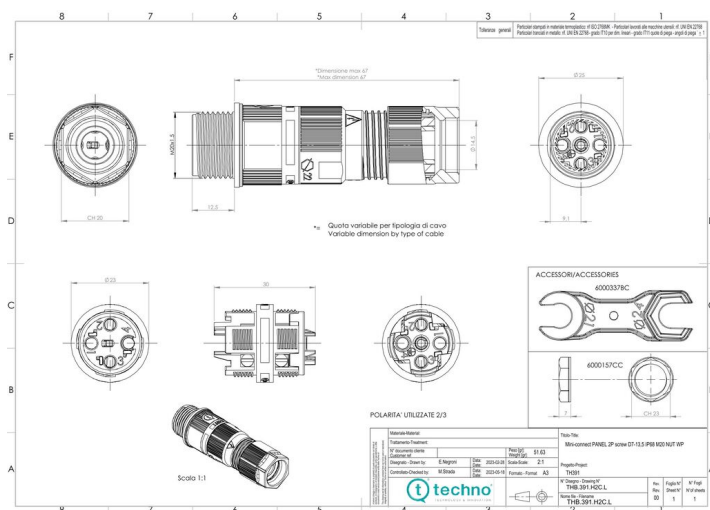

Specifications

General Characteristics

Series	TEETUBE
Subseries	TH391
Number of contacts	2
Product shape	I
Contact terminals	Screw
Cable section	0,25 - 2,5 mm²
Min-max cable diameter	7,0 - 13,5 mm
Cable entries/exits	2 ways
Protection degree	IP68/IP69
Protection degree details	IP68 (30m/2h)
Max. temperature	T85
Tracking index	PTI 250

Electrical parameters

Rated current	24 A
---------------	------

Product data sheet

Techno connectors

Joint connector panel-mounted, screw with wire protector



Rated voltage	450 V
---------------	-------

Material

Connector housing	PA66 GF UL94 V0
Cable glands	PA66 UL94 V2
Grommets	TPE
Co-moulded seals	TPE
Contact screw terminals	Brass
Standard/Piercing screws	Steel