


### Joint connector panel-mounted, screw



## M20, IP68/IP69

THB.391.H4A.L

<https://www.ac-solutions.be/en/product/thb391h4al>

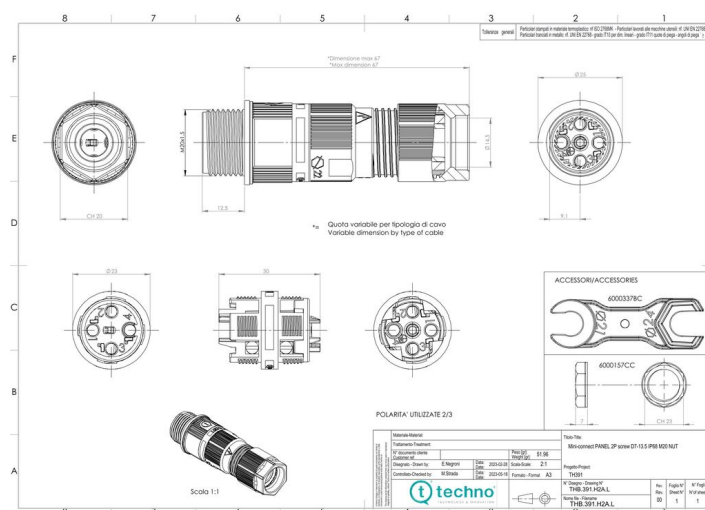

## Specifications

## General Characteristics

|                           |               |
|---------------------------|---------------|
| Series                    | TEETUBE       |
| Subseries                 | TH391         |
| Number of contacts        | 4             |
| Product shape             | I             |
| Contact terminals         | Screw         |
| Cable section             | 0,5 - 4,0 mm² |
| Min-max cable diameter    | 7,0 - 13,5 mm |
| Cable entries/exits       | 2 ways        |
| Protection degree         | IP68/IP69     |
| Protection degree details | IP68 (30m/2h) |
| Max. temperature          | T85           |
| Tracking index            | PTI 250       |

## Electrical parameters

|               |      |
|---------------|------|
| Rated current | 32 A |
|---------------|------|

# Product data sheet

## Techno connectors

Joint connector panel-mounted, screw



|               |       |
|---------------|-------|
| Rated voltage | 450 V |
|---------------|-------|

### Material

|                          |                 |
|--------------------------|-----------------|
| Connector housing        | PA66 GF UL94 V0 |
| Cable glands             | PA66 UL94 V2    |
| Grommets                 | TPE             |
| Co-moulded seals         | TPE             |
| Contact screw terminals  | Brass           |
| Standard/Piercing screws | Steel           |