

Product data sheet

Techno connectors

Joint connector panel-mounted, screw with wire protector




M25, IP68/IP69

including fixing nut

THB.391.L2C.L

<https://www.ac-solutions.be/en/product/thb391l2cl>

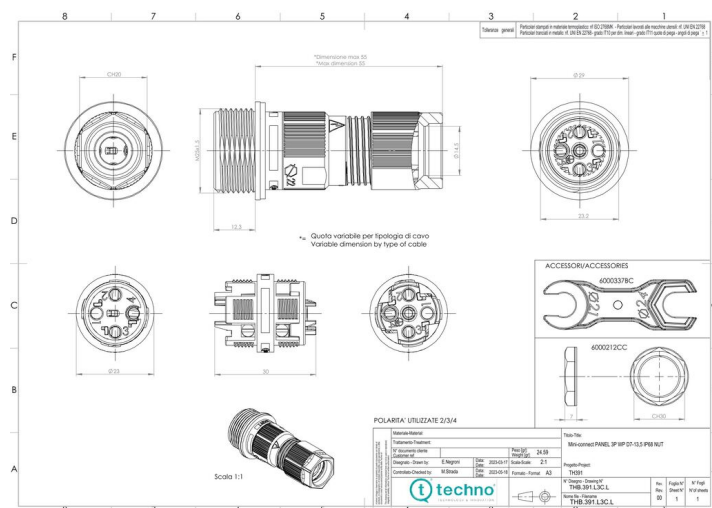

Specifications

General Characteristics

Series	TEETUBE
Subseries	TH391
Number of contacts	2
Product shape	I
Contact terminals	Screw
Cable section	0,25 - 2,5 mm ²
Min-max cable diameter	7,0 - 13,5 mm
Cable entries/exits	2 ways
Protection degree	IP68
Protection degree details	IP68 (30m/2h)
Max. temperature	T85
Standards	EN60529:1991+A1:2000 EN60998-1:2004 EN60998-2-1:2004
Tracking index	PTI 250

Electrical parameters

Product data sheet

Techno connectors

Joint connector panel-mounted, screw with wire protector



Rated current	24 A
Rated voltage	450 V

Material

Connector housing	PA66 GF UL94 V0
Cable glands	PA66 UL94 V2
Grommets	TPE
Co-moulded seals	TPE
Contact screw terminals	Brass
Standard/Piercing screws	Steel