

Product data sheet

Techno connectors

Junction connector T, Screw




IP68, 1-2-3-E marking

cable Ø 7,0-13,5mm

THB.402.D4A

<https://www.ac-solutions.be/en/product/thb402d4a>

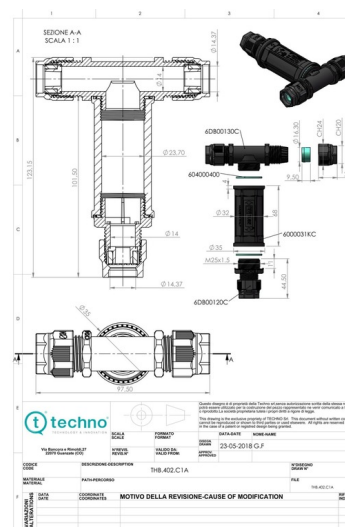

Specifications

General Characteristics

Series	TEETUBE
Subseries	TH402
Number of contacts	4
Product shape	T
Contact terminals	Screw
Cable section	1,5 - 4,0 mm ²
Min-max cable diameter	7,0 - 13,5 mm
Cable entries/exits	3 ways
Protection degree	IP68
Protection degree details	IP68 (20m/1h)
Max. temperature	T125
Standards	EN60529:1991+A1:2000 EN60998-1:2004 EN60998-2-1:2004
Tracking index	PTI 250

Electrical parameters

Product data sheet

Techno connectors

Junction connector T, Screw



Rated current	32 A
Rated voltage	450 V

Material

Body	PA66GF UL94 V0
Connector housing	PA66 GF UL94 V0
Cable glands	PA66 UL94 V2
Grommets	TPE
Contact screw terminals	Brass
Standard/Piercing screws	Steel