

# Product data sheet

## Techno connectors


### Socket connector screw D7-13.5



## IP66/IP68/IP69

THB.405.B2A

<https://www.ac-solutions.be/en/product/thb405b2a>

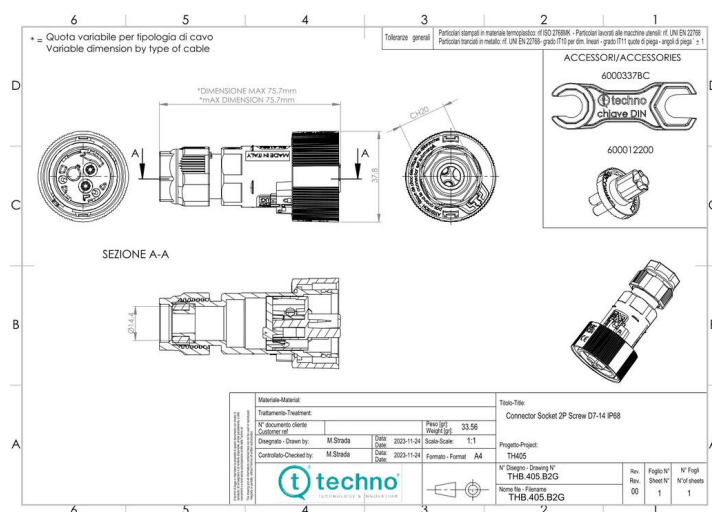

## Specifications

### General Characteristics

|                           |                                                                                                                                                                                  |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series                    | TEEPLUG                                                                                                                                                                          |
| Subseries                 | TH405                                                                                                                                                                            |
| Number of contacts        | 5                                                                                                                                                                                |
| Gender                    | Female                                                                                                                                                                           |
| Contact terminals         | Contact screw terminals. For cable section 1.0 mm <sup>2</sup>                                                                                                                   |
| Cable section             | max 4,0                                                                                                                                                                          |
| Min-max cable diameter    | 7,0 - 13,5 mm                                                                                                                                                                    |
| Protection degree         | IP66/IP68/IP69                                                                                                                                                                   |
| Protection degree details | IP68 (10m/1h)                                                                                                                                                                    |
| Lower temperature         | -40 °C                                                                                                                                                                           |
| Upper temperature         | +125 °C                                                                                                                                                                          |
| Pollution degree          | 2                                                                                                                                                                                |
| Note                      | Every connector housing type can be equipped with male or female contacts. For reasons pertaining to safety, only female contacts may be used in the live part of the connector. |
| Max. temperature          | T125                                                                                                                                                                             |

# Product data sheet

## Techno connectors

### Socket connector screw D7-13.5



|                |              |
|----------------|--------------|
| Standards      | EN61984:2001 |
| Tracking index | PTI 175      |

## Electrical parameters

|                           |        |
|---------------------------|--------|
| Rated current             | 17.5 A |
| Rated voltage             | 400 V  |
| Impulse withstand voltage | 6 kV   |

## Material

|                            |                                                             |
|----------------------------|-------------------------------------------------------------|
| Impulse withstand category | II                                                          |
| Lock nuts                  | PA66 GF UL94 V0 GWT 960°C black - grey RAL 7035             |
| Connector housing          | PA66 UL94 V0/V2 GWT 850°C black - grey RAL 7035             |
| Terminal block housing     | PA66 GF UL94 V0 GWT 960°C black - grey RAL 7035             |
| Grommets                   | TPE/silicon                                                 |
| Seals                      | TPE/silicon                                                 |
| Contact screw terminals    | Brass nickel plated OR Brass silver plated (THX.405.XXX.AG) |
| Standard/Piercing screws   | M3 steel zinc plated                                        |