



inserts: page:
CME 3+2 (aux) poles + ⊕ 149

insert centre distance:
57 x 27 mm

bulkhead mounting housings with 2 levers




bulkhead mounting housings with single lever




description	part No.	part No.
with one or two levers	CMI 03	CMI 03 L
with lever and cover		CMI 03 LS

panel cut-out for bulkhead mounting housings in mm

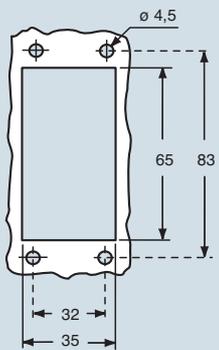


dimensions in mm

CMI

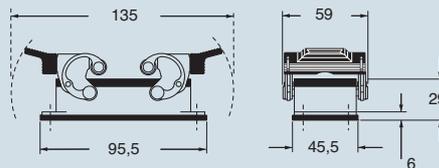


dimensions in mm

CMI L

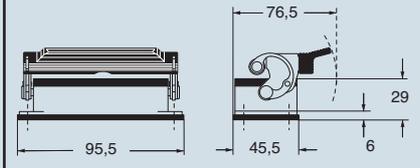

CMI LS

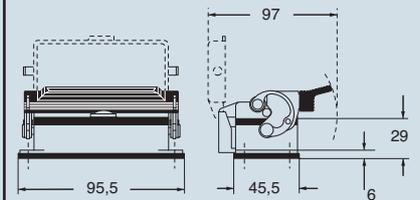

NB:
 The enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

CRAUS® Type 4/4X/12



dimensions shown are not binding and may be changed without notice



inserts: page:
CME 3+2 (aux) poles + ⊕ 149

insert centre distance:
57 x 27 mm

surface mounting housings with 2 levers



surface mounting housings with single lever




description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
with levers	CMP 03	16	MMP 03.20	20	CMP 03 L	16	MMP 03 L20	20
with levers	CMP 03.2	16 x 2	MMP 03.220	20 x 2	CMP 03 L2	16 x 2	MMP 03 L220	20 x 2
with levers, high construction			MMAP 03.32	32			MMAP 03 L32	32
with levers, high construction			MMAP 03.232	32 x 2			MMAP 03 L232	32 x 2
with levers, high construction			MMAP 03.40	40			MMAP 03 L40	40
with levers, high construction			MMAP 03.240	40 x 2			MMAP 03 L240	40 x 2
with lever and cover					CMP 03 LS	16	MMP 03 LS20	20
with lever and cover					CMP 03 LS2	16 x 2	MMP 03 LS220	20 x 2
with lever and cover, high construction							MMAP 03 LS32	32
with lever and cover, high construction							MMAP 03LS232	32 x 2
with lever and cover, high construction							MMAP 03 LS40	40
with lever and cover, high construction							MMAP 03LS240	40 x 2

NB:
 The enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

dimensions in mm


CMP - CMAP and MMP - MMAP

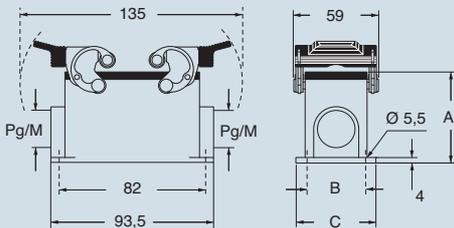


type	A	B	C
CMP / MMP	57	40	52
MMAP	74	45	57

dimensions in mm

CMP L and MMP L - MMAP L

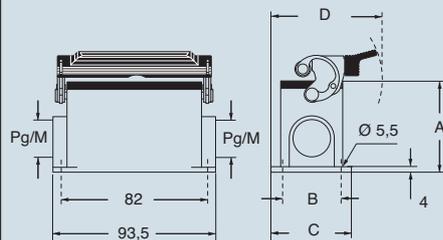

CMP LS and MMP LS - MMAP LS

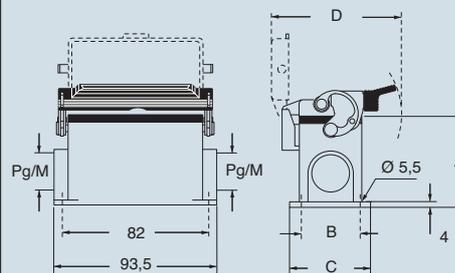

type	A	B	C	D
CMP L / MMP L	57	40	52	79.5
MMAP L	74	45	57	82
CMP LS / MMP LS	57	40	52	97
MMAP LS	74	45	57	97

CALUS Type 4/4X/12



dimensions shown are not binding and may be changed without notice

830V - size 57.27



inserts: page:
CME 3+2 (aux) poles + ⊕ 149

insert centre distance:
57 x 27 mm

hoods with 4 pegs



hoods with 2 pegs




description	hoods with 4 pegs		hoods with 4 pegs		hoods with 2 pegs		hoods with 2 pegs	
	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	CMO 03	16	MMO 03.20	20	CMO 03 L	16	MMO 03 L20	20
with pegs, side entry			MMO 03.25	25			MMO 03 L25	25
with pegs, side entry, high construction			MMAO 03.32	32			MMAO 03 L32	32
with pegs, side entry, high construction			MMAO 03.40	40			MMAO 03 L40	40
with pegs, top entry	CMV 03	16	MMV 03.20	20	CMV 03 L	16	MMV 03 L20 *	20
with pegs, top entry			MMV 03.25	25			MMV 03 L25	25
with pegs, top entry, high construction			MMAV 03.32	32			MMAV 03 L32	32
with pegs, top entry, high construction			MMAV 03.40	40			MMAV 03 L40	40

* can only be used with a complete cable gland (to be purchased separately)


dimensions in mm

CMO and MMO (MMAO)

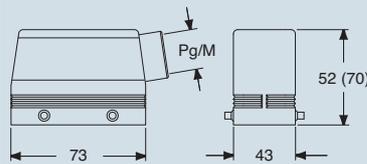


dimensions in mm


CMO L and MMO L (MMAO L)

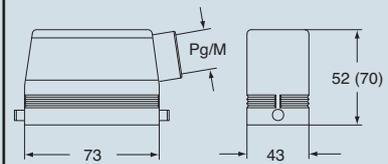

CMV and MMV (MMAV)

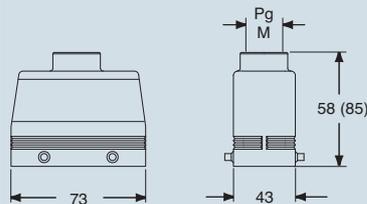

CMV L and MMV L (MMAV L)

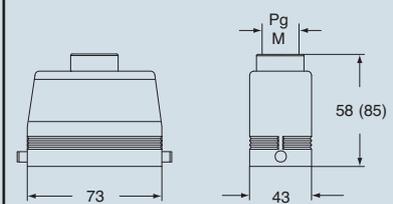

CALUS Type 4/4X/12



dimensions shown are not binding and may be changed without notice



inserts: page:
CME 3+2 (aux) poles + ⊕ 149

insert centre distance:
57 x 27 mm

hoods with 2 levers




covers



description	part No.		part No.		part No.		part No.	
		entry Pg		entry M	(with eyelet)	entry	(with loop)	entry
with levers and gasket, top entry	CMV 03 G	16	MMV 03 G25	25				
with levers and gasket, top entry, high construction			MMAV 03 G25	25				
with levers and gasket, top entry, high construction			MMAV 03 G32	32				
with 4 pegs (for enclosures with 2 levers with gasket)					CHC 10			
with 2 pegs (for enclosures with 1 lever with gasket)					CHC 10 L			
with 2 levers (for hoods with 4 pegs)							CHC 10 G	
with 1 lever (for hoods with 2 pegs)							CHC 10 LG	


dimensions in mm

CMV G and MMV G (MMAV G)

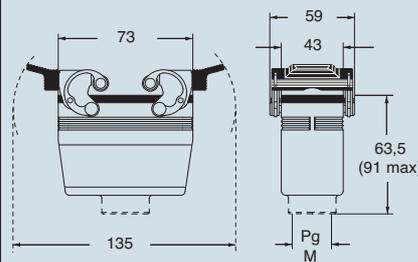


dimensions in mm


CHC





CHC L



CHC G

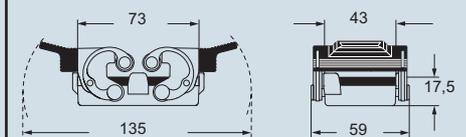

CHC LG

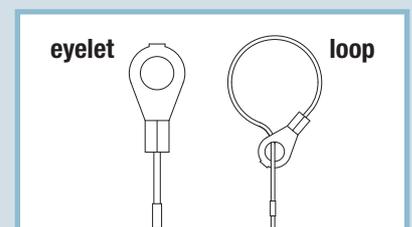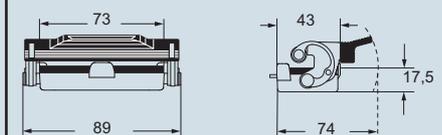

CALUS Type 4/4X/12



dimensions shown are not binding and may be changed without notice

830V - size 57.27