

enclosures:  
size "44.27"  
size "57.27"

- degree of protection IP65  
(according to EN 60529)

1 branch-off T-BOX coupling



1 branch-off T-BOX coupling  
to be fitted on DIN rails



description

part No.

part No.

for 2 **C** hoods with lever and gasket "44.27" size and one housing "44.27" **A** size

CYG 06H06

for 2 **C** hoods with lever and gasket "44.27" size and one housing "57.27" **A** size

CYG 06H10

for 2 **C** hoods with lever and gasket "57.27" size and one housing "44.27" **A** size

CYG 06H06D

for 2 **C** hoods with lever and gasket "57.27" size and one housing "57.27" **A** size

CYG 06H10D

How to use the CYG 06H branch coupling

The cables are branched off by using the CYG 06H coupling in the 1 or 2 branch-off versions. Multi-pole inserts "44.27" size can be fitted inside the two side recesses.

The entire unit can be used with one lever hoods complete with connector inserts.

The front faces can be fitted with "44.27" and/or "57.27" size bulkhead housings.


The coupling may also be used as an adapter by using a combination of different insert versions.

The CHC 06 LG cover may be used to close the coupling side faces.

In the branch-offs, the CSS series dual spring terminal inserts allow two wires to be connected without having to fit additional terminals inside the coupling.

dimensions in mm


CYG...H06 / H10

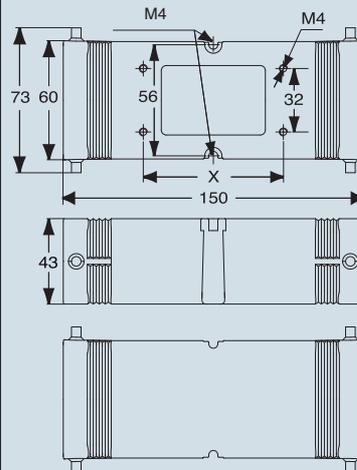

part No.	X
CYG 06H06	70
CYG 06H10	83

dimensions in mm

CYG...H06D / H10D

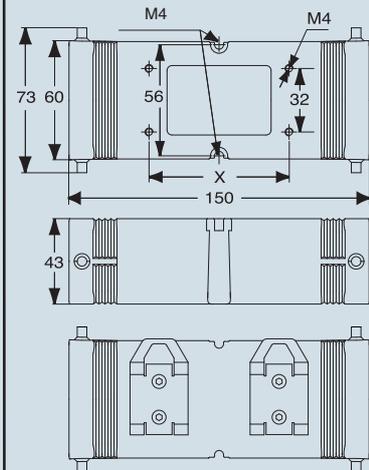


part No.	X
CYG 06H06D	70
CYG 06H10D	83

**CALUS** Type 4/4X/12

Legend:

- A** bulkhead mounting housings
- C** hoods with lever and gasket (LG)

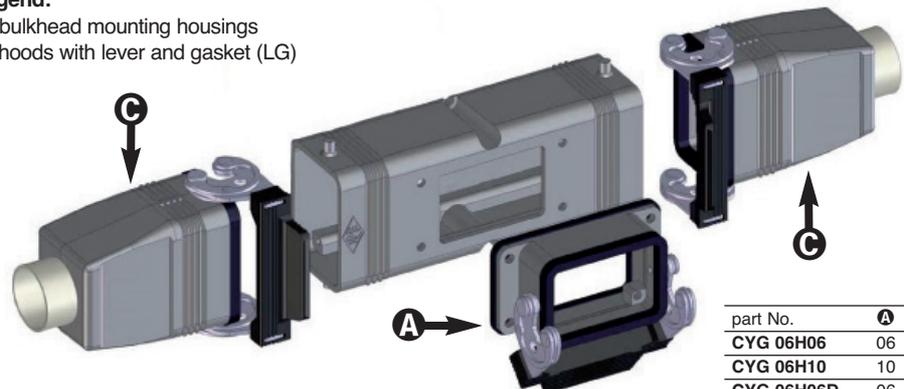

part No.	A	C
CYG 06H06	06	06
CYG 06H10	10	06
CYG 06H06D	06	06
CYG 06H10D	10	06

dimensions shown are not binding  
and may be changed without notice


enclosures:  
size "44.27"  
size "57.27"

- degree of protection IP65  
(according to EN 60529)

2 branch-off T-BOX coupling



2 branch-off T-BOX coupling




description	part No.	part No.
for 2 <b>C</b> "44.27" size hoods with lever and gasket and 1 "44.27" <b>B</b> size fixing side housing and one "57.27" <b>A</b> size housing	<b>CYG 06H0610</b>	
for 2 <b>C</b> "44.27" size hoods with lever and gasket and 1 "57.27" <b>B</b> size fixing side housing and one "44.27" <b>A</b> size enclosure	<b>CYG 06H1006</b>	
for 2 <b>C</b> "44.27" size hoods with lever and gasket and two "44.27" <b>A</b> and <b>B</b> size housing		<b>CYG 06H0606</b>
for 2 <b>C</b> "44.27" size hoods with lever and gasket and two "57.27" <b>A</b> and <b>B</b> size housing		<b>CYG 06H1010</b>

**How to use the CYG 06H branch coupling**

The cables are branched off by using the CYG 06H coupling in the 1 or 2 branch-off versions. Multi-pole inserts "44.27" size can be fitted inside the two side recesses. The entire unit can be used with one lever hoods complete with connector inserts. The front faces can be fitted with "44.27" and/or "57.27" size bulkhead housings. The coupling may also be used as an adapter by using a combination of different insert versions. The CHC 06 LG cover may be used to close the coupling side faces. In the branch-offs, the CSS series dual spring terminal inserts allow two wires to be connected without having to fit additional terminals inside the coupling.

dimensions in mm

**CYG...H0610 / H1006 and CYG...H0606 / H1010**

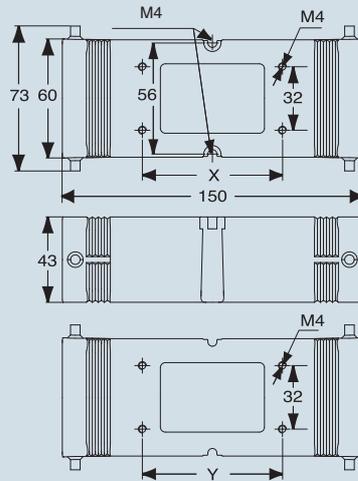


part No.	X	Y
<b>CYG 06H0610</b>	83	70
<b>CYG 06H1006</b>	70	83
<b>CYG 06H0606</b>	70	70
<b>CYG 06H1010</b>	83	83

**Legend:**

- A** bulkhead mounting housings
- B** bulkhead mounting housings
- C** hoods with lever and gasket (LG)

part No.	A	B	C
<b>CYG 06H0610</b>	06	10	06
<b>CYG 06H1006</b>	10	06	06
<b>CYG 06H0606</b>	06	06	06
<b>CYG 06H1010</b>	10	10	06

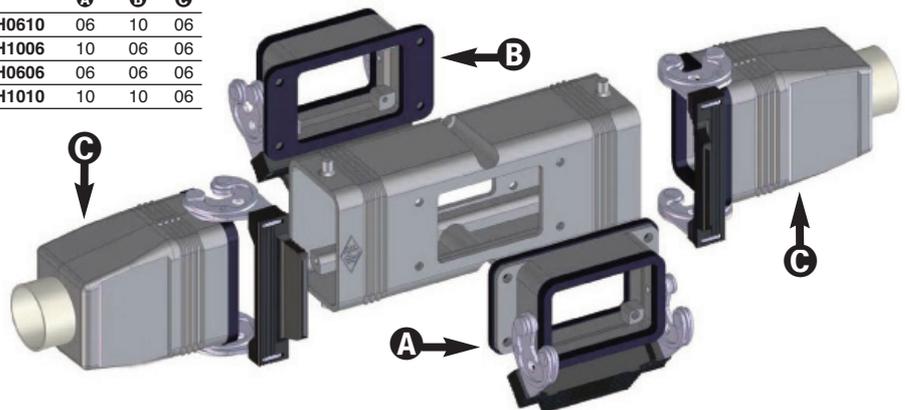

**CALUS**® Type 4/4X/12

dimensions shown are not binding and may be changed without notice