


ECN. NO.	REV.	DATE	DESCRIPTION	CHANGE	APPD.
	X1	08/17/2015	初版发行	/	

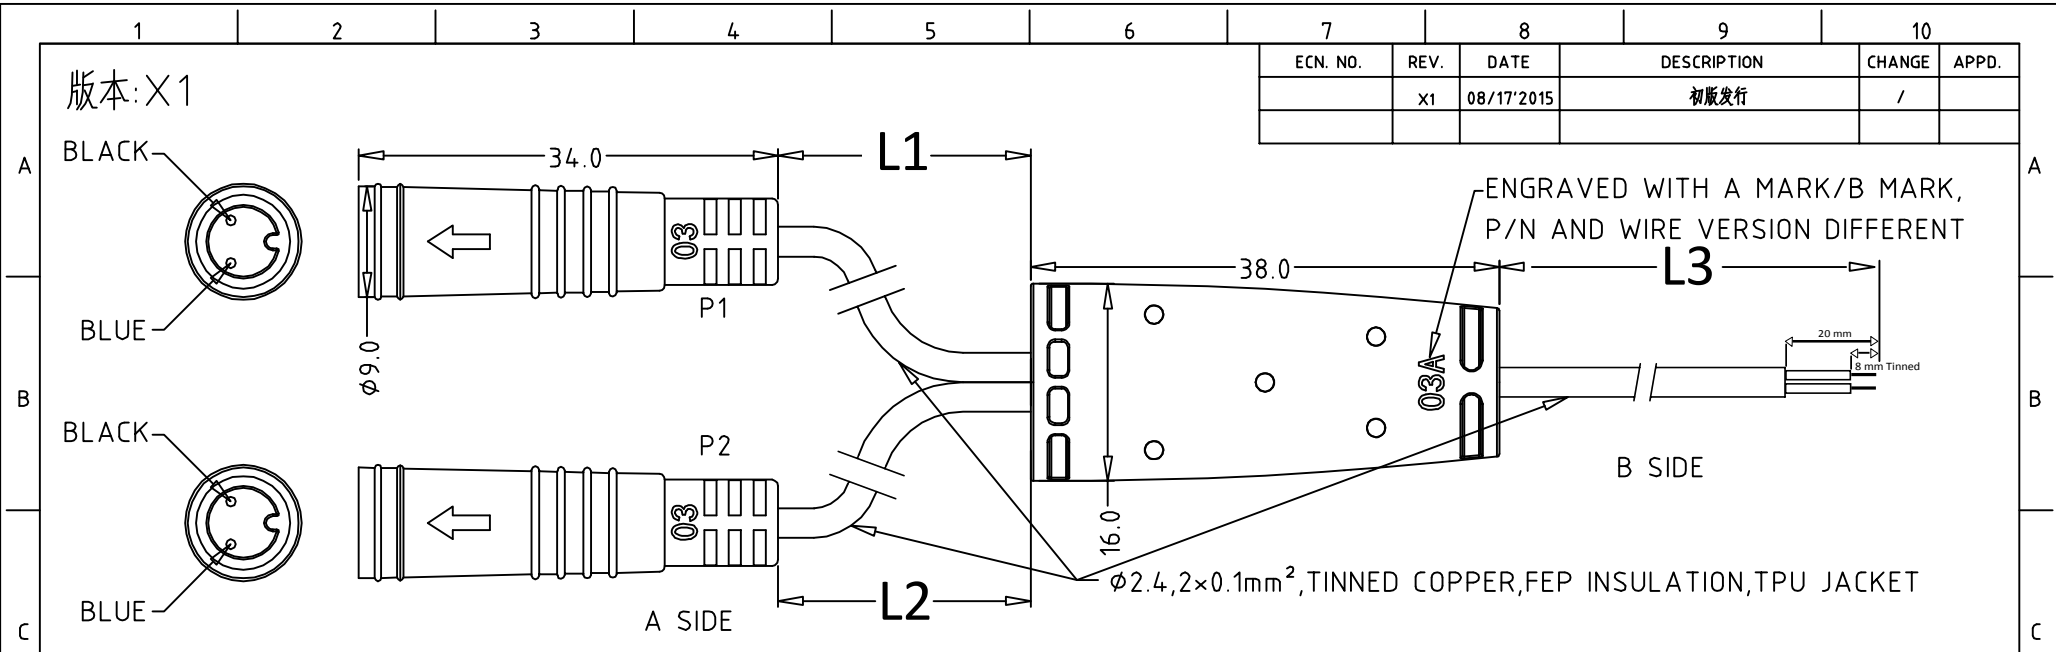

1. Electrical Characteristics:
- 1.1: Low level contact resistance: 10 milliohm Max.
 - 1.2: Dielectric withstanding voltage: 500VAC.
 - 1.3: Insulation resistance: 20 megaohm Min.
2. Mechanical Characteristics:
- 2.1: Durability: 200 cycle.
3. Performance:
- 3.1: Voltage rating: 48V AC, 60V DC.
 - 3.2: Current rating:
2Amps ($\phi 0.6$ pin and socket).
 - 3.3: Operation temperature: $-25^{\circ}\text{C} \sim +80^{\circ}\text{C}$.
4. Requirement:
- 4.1: Environmental protection, accord ROHS 2.0.
5. Applicable wire:
 $\phi 0.6$ Contact: 0.2mm^2 MAX.
6. Degree of protection:
IP66 in mated condition

L1 = 378 mm \pm 5 mm
L2 = 378 mm \pm 5 mm
L3 = 1550 mm \pm 5 mm

PART NO.	MARK	NO.	A SIDE		B SIDE
			P1	P2	
5300.0085	03A	1	BLACK	BLACK	BLACK
		2	BLUE	BLUE	BLUE

MAT'L: N/A		Higo 上海海固电器设备有限公司 Shang hai Higo Electronic Technology Co., Ltd.			
UNITS: mm		TITLE: 1T2 CABLE		PART NO.:	
X.±: 8	X*.±: 5°	APPD:		DWG NO.:	
.X±: 0.5	.X*.±: 2°	CHED:			
.XX±: 0.05	.XX*.±: 1°	DRAW: Gary zhou 08/17/2015		SCALE	SHEET
				N/A	1/1