

Product data sheet

Binder connectoren

Female panel mount connector





With shielding sheet

09 0066 70 07

<https://www.ac-solutions.be/nl/product/0900667007>



Ansicht ohne Polbild
View without contacts

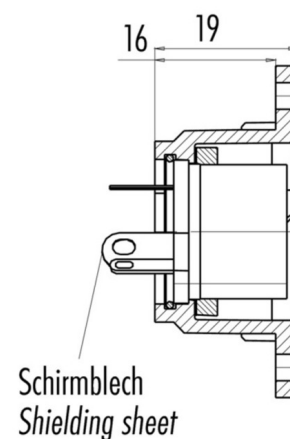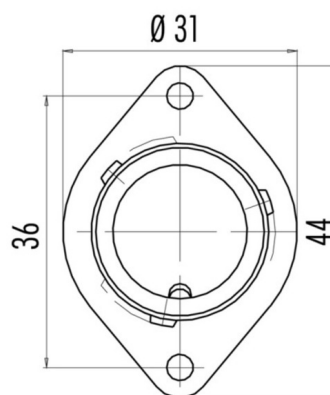

Specificaties

General Characteristics

Series	Power
Subseries	690
Gender	Female
Number of contacts	7
Contact terminal	Solder
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP40
Locking system	Bayonet
Mating cycles	>500
Connector Diameter	29 mm
Wire-section	0.75 mm ²

Electrical parameters

Nominal current	5 A
-----------------	-----

Product data sheet

Binder connectoren

Female panel mount connector



Nominal voltage	250 V
Impuls voltage	2500 V
Max. contact resistance	8 m?
Pollution degree	1
Overvoltage categorie	II

Material

Material group	III
Material of insert	PBT (UL 94 V-0)
Material of housing	PBT (UL 94 V-0)
Material of contact	CuSn (Bronze)
Plating	Ag (Silver)