


## Male panel mount connector

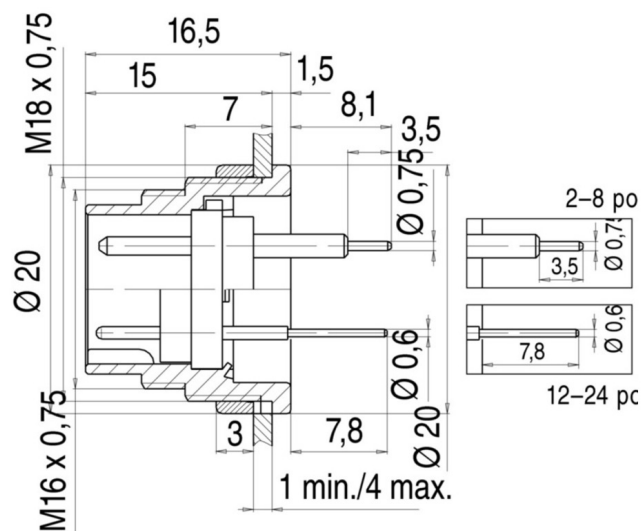

# Product data sheet

## Binder connectoren

### Male panel mount connector



|                         |            |
|-------------------------|------------|
| Nominal current         | 5 A        |
| Nominal voltage         | 125 (32) V |
| Impuls voltage          | 800 V      |
| Max. contact resistance | 3 m?       |
| Pollution degree        | 1 (2)*     |
| Overvoltage categorie   | I (II)*    |

## Material

|                     |                               |
|---------------------|-------------------------------|
| Material group      | III                           |
| Material of insert  | PBT (UL 94 V-0)               |
| Material of housing | Zinc diecasting nickel plated |
| Material of contact | CuZn (Brass)                  |
| Plating             | Au (Gold)                     |