

Product data sheet

Binder connectoren


Female panel mount connector



SMT, Shieldable

09 0732 601 04

<https://www.ac-solutions.be/nl/product/09073260104>

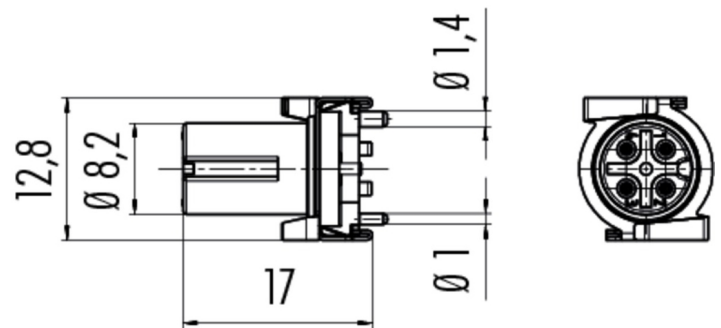

Specificaties

General Characteristics

Screw size	M12-D
Series	Sensor
Subseries	825-876
Gender	Female
Number of contacts	4
Contact terminal	SMT
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw (M12-D)
Mating cycles	>100
Connector Diameter	8.2 mm

Electrical parameters

Nominal current	4 A
-----------------	-----

Product data sheet

Binder connectoren

Female panel mount connector



Nominal voltage	250 V
Impuls voltage	2500 V

Material

Material of insert	LCP
Material of contact	CuSn (Bronze)
Plating	Au (Gold)