

Product data sheet

Binder connectoren


Female panel mount connector



front fastened, dip solder

09 3782 91 08

<https://www.ac-solutions.be/nl/product/0937829108>

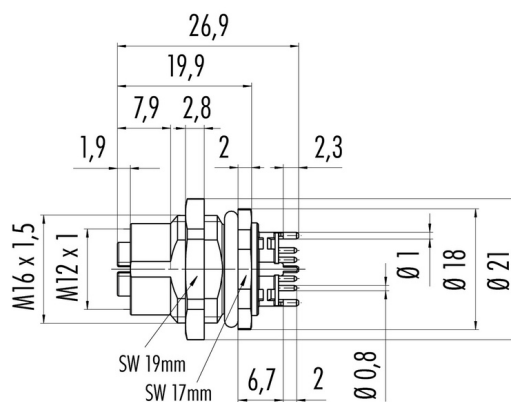

Sechskantmutter lose beigelegt
Hexagon nut enclosed loose

Specificaties

General Characteristics

Screw size	M12-X
Series	Sensor
Subseries	825-876
Gender	Female
Number of contacts	8
Contact terminal	Dip solder
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw (M12-X)
Mating cycles	>100
Connector Diameter	21 mm
Cable outlet	6-8 mm

Electrical parameters

Product data sheet

Binder connectoren

Female panel mount connector



Nominal current	0.5 A
Nominal voltage	50 AC, 60 DC
Max. contact resistance	10 m Ω
Pollution degree	3
Overvoltage categorie	II

Material

Material group	III
Material of insert	PA
Material of housing	Zinc diecasting nickel plated
Material of contact	CuSn (Bronze)
Plating	Au (Gold)