

Product data sheet

Binder connectoren

Male panel mount connector




3+PE, central locking, screw clamp connection

UL-approval

09 4223 150 04

<https://www.ac-solutions.be/nl/product/09422315004>

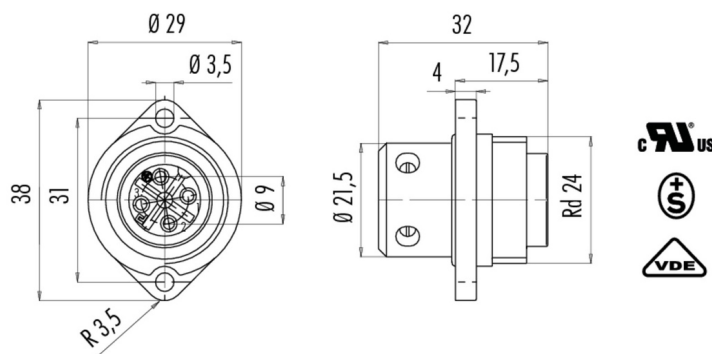

Specificaties

General Characteristics

Screw size	RD24
Series	Power
Subseries	692-693
Gender	Male
Number of contacts	4
Contact terminal	Screw
Upper temperature	+100 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw (RD24)
Mating cycles	>500
Connector Diameter	29 mm
Wire-section	1,5 - 2,5 mm²

Electrical parameters

Product data sheet

Binder connectoren

Male panel mount connector



Nominal current	16 (12 A UL)
Nominal voltage	600 V
Impuls voltage	6000 V
Max. contact resistance	5 m?
Pollution degree	3
Overvoltage categorie	III

Material

Material group	III
Material of insert	PBT
Material of contact	CuZn (Brass)
Plating	Ag (Silver)