

Product data sheet

Binder connectoren

Adapter, lead through for control cabinet




female-female, shielded

UL-approval

09 5286 00 08

<https://www.ac-solutions.be/nl/product/0952860008>

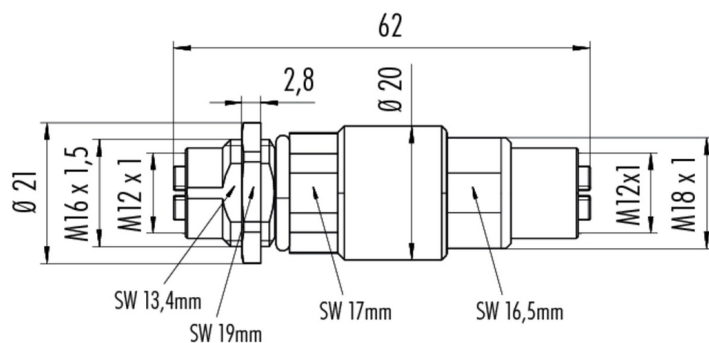

Specificaties

General Characteristics

Screw size	M12-X
Series	Sensor
Subseries	825-876
Gender	Female
Number of contacts	8
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw (M12-X)
Mating cycles	>50
Connector Diameter	21 mm

Electrical parameters

Nominal current	4 A
-----------------	-----

Product data sheet

Binder connectoren

Adapter, lead through for control cabinet



Nominal voltage	50 AC, 60 DC
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	II

Material

Material group	III
Material of insert	PA (UL 94 HB)
Material of contact	CuZn (Brass)
Plating	Au (Gold)