

Product data sheet

Binder connectoren


Male panel mount connector



With dip solder termination

09 9749 20 03

<https://www.ac-solutions.be/nl/product/0997492003>

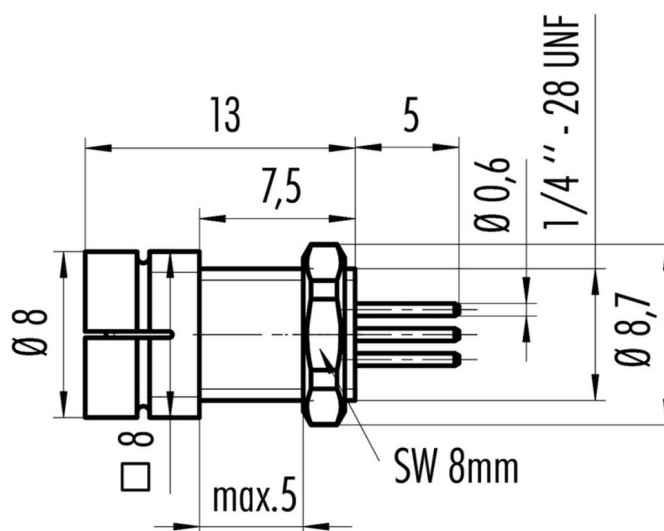

Specificaties

General Characteristics

Series	Subminiature
Subseries	719-709
Gender	Male
Number of contacts	3
Contact terminal	Dip solder
Upper temperature	+70 °C
Lower temperature	-25 °C
Protection degree	IP40
Locking system	Snap-in
Mating cycles	>100
Connector Diameter	8 mm
Wire-section	0.25 mm ²

Electrical parameters

Nominal current	3 A
-----------------	-----

Product data sheet

Binder connectoren

Male panel mount connector



Nominal voltage	60 V
Impuls voltage	800 V
Max. contact resistance	3 m?
Pollution degree	1
Overvoltage categorie	II

Material

Material group	III
Material of insert	PA
Material of housing	PA
Material of contact	CuZn (Brass)
Plating	Au (Gold)