

# Product data sheet

## Hummel connectoren


Inserts 4+3+PE 630V



## Pins

7.001.908.137

<https://www.ac-solutions.be/nl/product/7001908137>

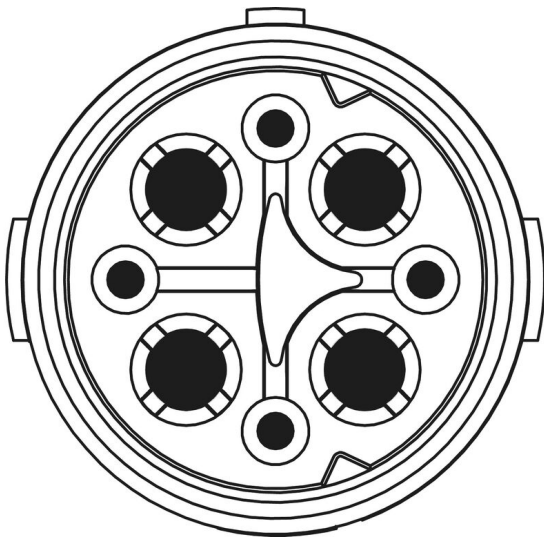

## Specificaties

### General Characteristics

|                      |                         |
|----------------------|-------------------------|
| Size                 | M16                     |
| Number of contacts   | 4+3+PE                  |
| Gender               | Male                    |
| Upper temperature    | +125 °C                 |
| Lower temperature    | -40 °C                  |
| Locking              | Screw locking   Twilock |
| Protection degree    | IP67/IP69K              |
| Terminal type        | Dip-solder              |
| Included contacts    | dip solder length 17 mm |
| Contact diameter (a) | 0.8 mm                  |
| Contact diameter (b) | 1.25                    |

### Electrical Parameters

|                                             |        |
|---------------------------------------------|--------|
| Nominal voltage (degree of pollution 3) (a) | 300 V~ |
| Nominal voltage (degree of pollution 3) (b) | 630 V~ |

# Product data sheet

## Hummel connectoren

### Inserts 4+3+PE 630V



|                             |                      |
|-----------------------------|----------------------|
| Test voltage (a)            | 1500 V~              |
| Test voltage (b)            | 2500 V~              |
| Nominal current             | 5 A                  |
| Nominal current (b)         | 16 A                 |
| Insulation resistance       | > 10 <sup>12</sup> ? |
| Max. contact resistance (a) | 3 m?                 |
| Max. contact resistance (b) | 3 m?                 |

## Material

|          |                                                       |
|----------|-------------------------------------------------------|
| Material | Thermoplastic Polyamid PA 6/Fire protection class V-0 |
|----------|-------------------------------------------------------|